




Dimensions Drawing

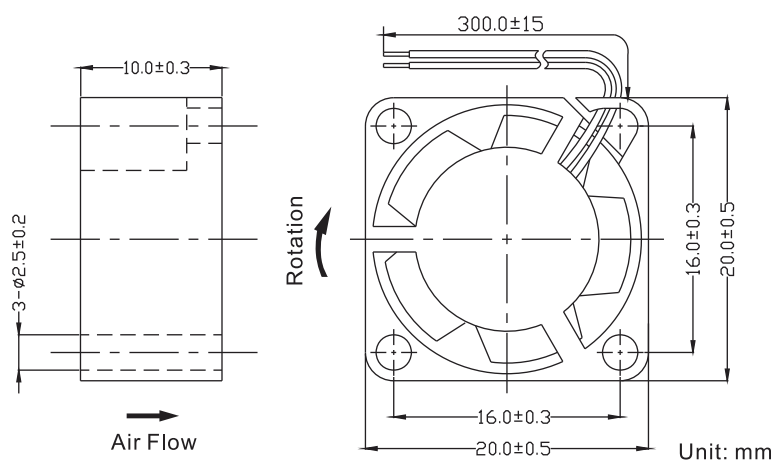

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
5%~90%RH

Storage Temperature : -40°C~75°C
5%~95%RH



Performance Curves

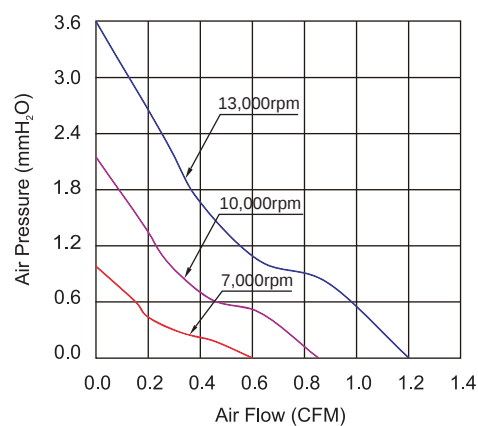

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
DFS201005H	Sleeve	5	4.0~6.0	0.20	13,000	1.2	3.6	31	•				4.8
DFS201005M			4.0~6.0	0.16	10,000	0.9	2.1	28	•				
DFS201005L			4.0~6.0	0.12	7,000	0.6	1.0	25	•				
DFB201005H	Ball		4.0~6.0	0.20	13,000	1.2	3.6	31	•				
DFB201005M			4.0~6.0	0.16	10,000	0.9	2.1	28	•				
DFB201005L			4.0~6.0	0.12	7,000	0.6	1.0	25	•				
DFS201012H	Sleeve	12	10.8~13.2	0.09	13,000	1.2	3.6	31	•				
DFS201012M			10.8~13.2	0.075	10,000	0.9	2.1	28	•				
DFS201012L			10.8~13.2	0.06	7,000	0.6	1.0	25	•				
DFB201012H	Ball		10.8~13.2	0.09	13,000	1.2	3.6	31	•				
DFB201012M			10.8~13.2	0.075	10,000	0.9	2.1	28	•				
DFB201012L			10.8~13.2	0.06	7,000	0.6	1.0	25	•				