




Dimensions Drawing

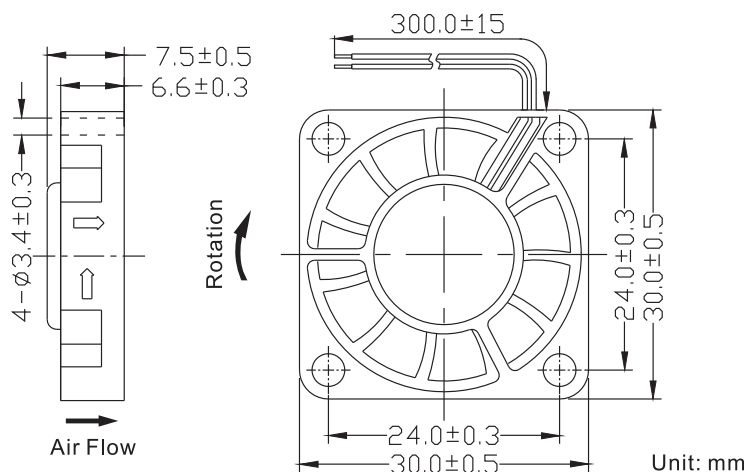

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
5%~90%RH

Storage Temperature : -40°C~75°C
5%~95%RH

(5V 12V)

Performance Curves

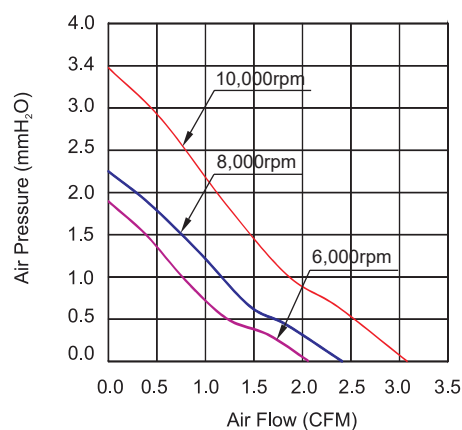

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
DFS300605H	Sleeve	5	4.0~6.0	0.20	8,000	2.41	2.25	28	•	•			5
DFS300605M			4.0~6.0	0.12	6,000	2.15	1.92	22	•	•			
DFB300605H	Ball		4.0~6.0	0.20	8,000	2.41	2.25	28	•	•			
DFB300605M			4.0~6.0	0.12	6,000	2.15	1.92	22	•	•			
DFS300612H	Sleeve	12	10.8~13.2	0.12	8,000	2.41	2.25	28	•	•			
DFS300612M			10.8~13.2	0.10	6,000	2.15	1.92	22	•	•			
DFB300612H	Ball		10.8~13.2	0.12	10,000	3.08	3.40	32	•	•			
DFB300612M			10.8~13.2	0.10	8,000	2.41	2.25	28	•	•			