




Dimensions Drawing

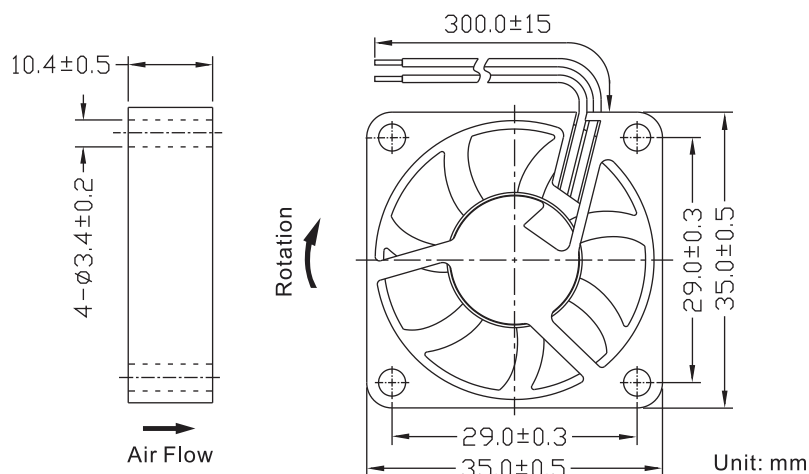

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type

(+) : Red (-) : Black


Operation Temperature : -10°C~70°C
5%~90%RH

Storage Temperature : -40°C~75°C
5%~95%RH

(5V)

(12V)

Performance Curves

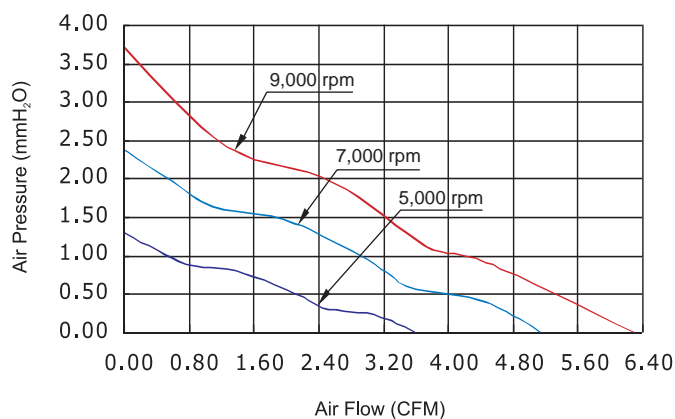

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
DFS351005H	Sleeve	5	4.0~6.0	0.23	9,000	6.3	3.7	32	•	•			9
DFS351005M			4.0~6.0	0.22	7,000	5.1	2.4	25	•	•			
DFS351005L			4.0~6.0	0.13	5,000	3.5	1.3	20	•	•			
DFB351005H	Ball		4.0~6.0	0.23	9,000	6.3	3.7	32	•	•			
DFB351005M			4.0~6.0	0.22	7,000	5.1	2.4	25	•	•			
DFB351005L			4.0~6.0	0.13	5,000	3.5	1.3	20	•	•			
DFS351012H	Sleeve	12	10.8~13.2	0.10	9,000	6.3	3.7	32	•	•			
DFS351012M			10.8~13.2	0.09	7,000	5.1	2.4	25	•	•			
DFS351012L			10.8~13.2	0.08	5,000	3.5	1.3	20	•	•			
DFB351012H	Ball		10.8~13.2	0.10	9,000	6.3	3.7	32	•	•			
DFB351012M			10.8~13.2	0.09	7,000	5.1	2.4	25	•	•			
DFB351012L			10.8~13.2	0.08	5,000	3.5	1.3	20	•	•			