




Dimensions Drawing

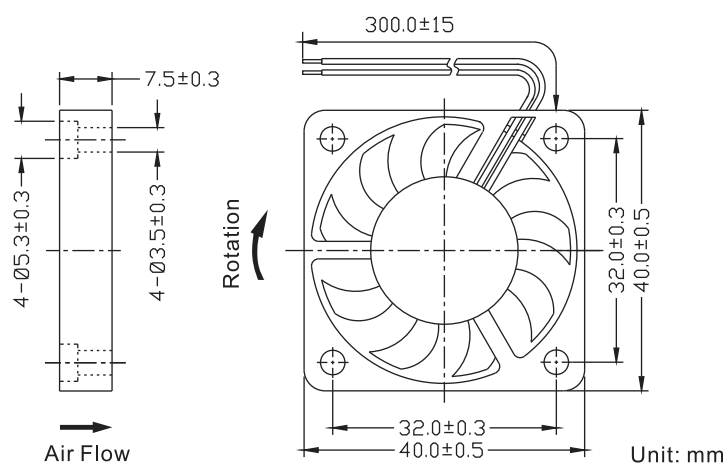

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
5%~90%RH

Storage Temperature : -40°C~75°C
5%~95%RH



Performance Curves

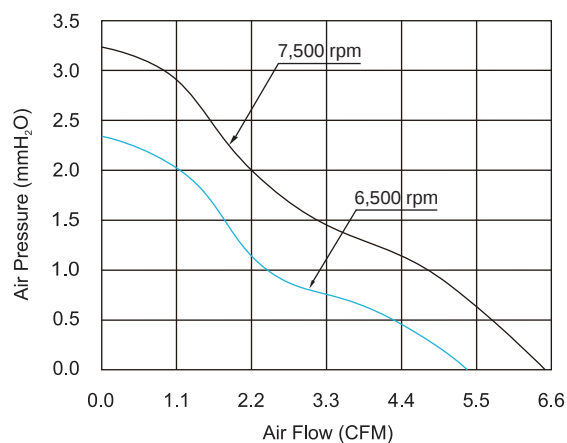

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
DFS400705H	Sleeve	5	4.0~6.0	0.25	7,500	6.5	3.3	34	•				10.5
DFS400705M			4.0~6.0	0.23	6,500	5.4	2.4	30	•				
DFB400705H	2 Balls		4.0~6.0	0.25	7,500	6.5	3.3	34	•				
DFB400705M			4.0~6.0	0.23	6,500	5.4	2.4	30	•				
DFS400712H	Sleeve	12	10.8~13.2	0.13	7,500	6.5	3.3	34	•				
DFS400712M			10.8~13.2	0.11	6,500	5.4	2.4	30	•				
DFB400712H	2 Balls		10.8~13.2	0.13	7,500	6.5	3.3	34	•				
DFB400712M			10.8~13.2	0.11	6,500	5.4	2.4	30	•				