





## Dimensions Drawing

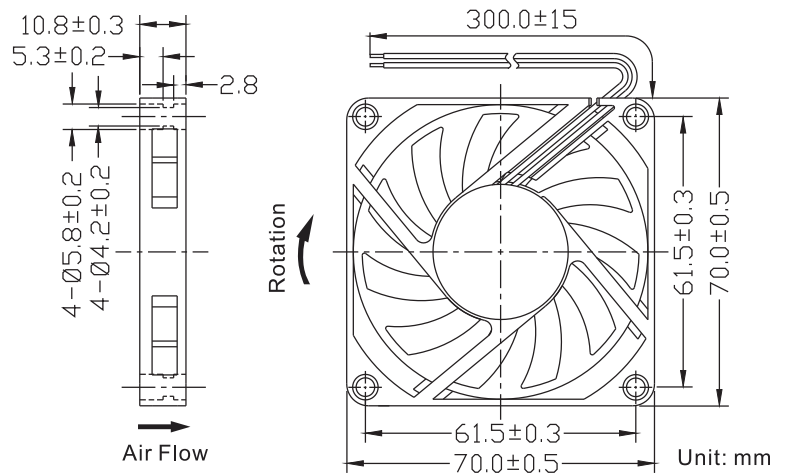

## General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type  
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C  
5%~90%RH
- Storage Temperature : -40°C~75°C  
5%~95%RH
- (12V 24V)

## Performance Curves

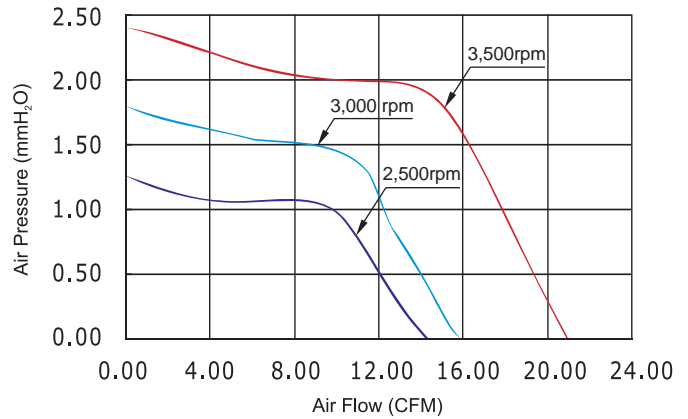

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH <sub>2</sub> O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
DFS701012H	Sleeve	12	10.8~13.2	0.21	3,500	21.0	2.4	34	•	•		•	35
DFS701012M			10.8~13.2	0.14	3,000	16.0	1.8	30	•	•		•	
DFS701012L			10.8~13.2	0.10	2,500	15.0	1.3	25	•	•		•	
DFB701012H	Ball		10.8~13.2	0.21	3,500	21.0	2.4	34	•	•		•	
DFB701012M			10.8~13.2	0.14	3,000	16.0	1.8	30	•	•		•	
DFB701012L			10.8~13.2	0.10	2,500	15.0	1.3	25	•	•		•	
DFS701024H	Sleeve	24	17.0~28.0	0.13	3,500	21.0	2.4	34	•	•		•	
DFS701024M			17.0~28.0	0.11	3,000	16.0	1.8	30	•	•		•	
DFS701024L			17.0~28.0	0.08	2,500	15.0	1.3	25	•	•		•	
DFB701024H	Ball		17.0~28.0	0.13	3,500	21.0	2.4	34	•	•		•	
DFB701024M			17.0~28.0	0.11	3,000	16.0	1.8	30	•	•		•	
DFB701024L			17.0~28.0	0.08	2,500	15.0	1.3	25	•	•		•	

● All readings are typical values at rated voltage.  
● Specifications are subjected to change without prior notice.