





Dimensions Drawing

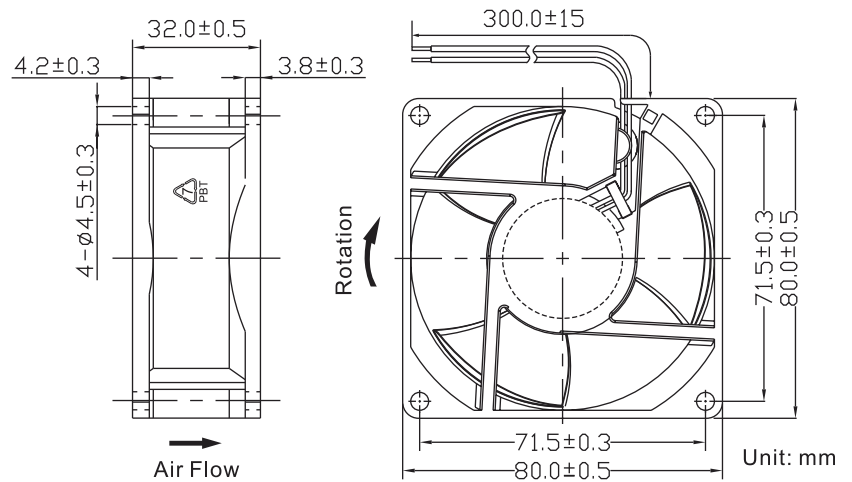

General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C
5%~90%RH
- Storage Temperature : -40°C~75°C
5%~95%RH
- (12V)

Performance Curves

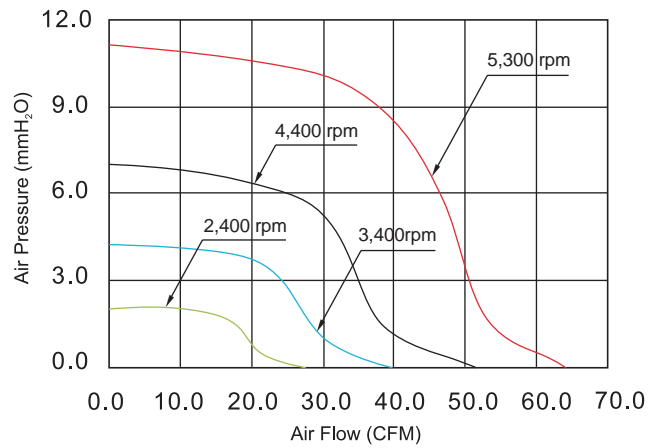

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
DFS803212D	Sleeve	12	10.8~13.2	0.60	5,300	64.1	11.1	49	•	•	•	•	110
DFS803212H			10.8~13.2	0.40	4,400	51.6	7.2	41	•	•	•	•	
DFS803212M			10.8~13.2	0.20	3,400	39.6	4.3	36	•	•	•	•	
DFS803212L			10.8~13.2	0.15	2,400	27.4	2.1	25	•	•	•	•	
DFB803212D	Ball		4.0~6.0	0.60	5,300	64.1	11.1	49	•	•	•	•	
DFB803212H			4.0~6.0	0.40	4,400	51.6	7.2	41	•	•	•	•	
DFB803212M			4.0~6.0	0.20	3,400	39.6	4.3	36	•	•	•	•	
DFB803212L			4.0~6.0	0.15	2,400	27.4	2.1	25	•	•	•	•	

● All readings are typical values at rated voltage.
● Specifications are subjected to change without prior notice.