




General Specification

- Impeller : PBT UL94V-0 Reinforced Plastic
- Frame : Aluminum Alloy
- Terminals : 0.5mm
- Lead Wire : AWG#22 UL 1430(Optional)
- Motor : Shaded Pole Induction Motor
- Operation Temperature : -10°C~+70°C
35%~85%RH
- Storage Temperature : -40°C~75°C
35%~85%RH




Dimensions Drawing

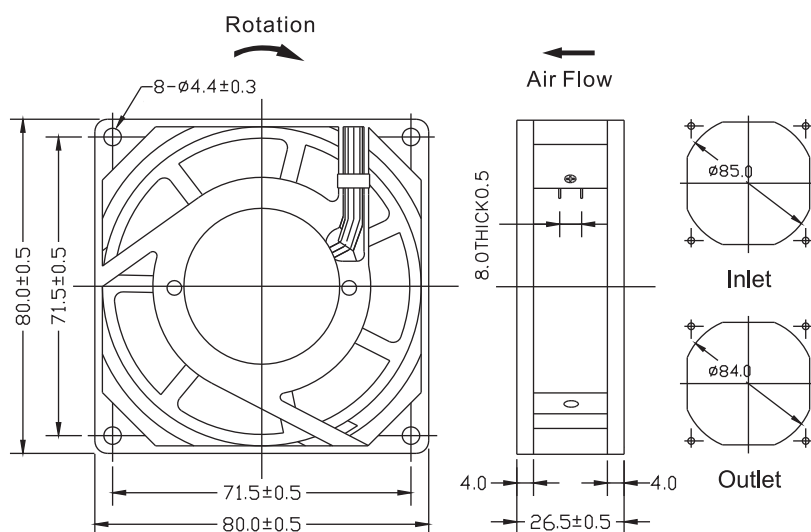

Unit: mm

Performance Curves

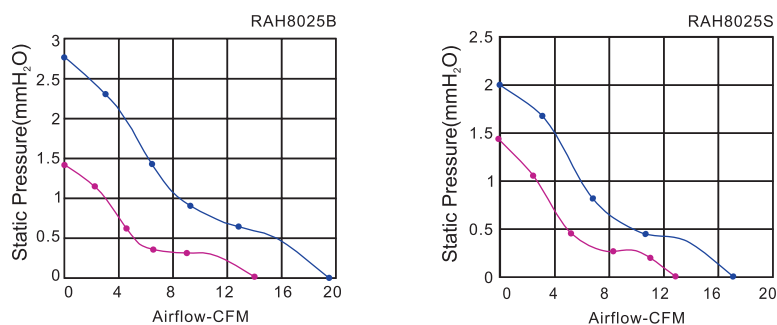

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH ₂ O)	Weight Gram
								M ³ /hr	CFM		
RAH8025S1	Sleeve	220~240	50/60	0.1	13/11	1600/2100	20/23	22/29	13/17	1.4/2.0	208
RAH8025S2		100~125	50/60	0.13	13/11	1600/2100	20/23	22/29	13/17	1.4/2.0	
RAH8025B1	Ball	220~240	50/60	0.1	13/11	1700/2200	21/26	24/32	14/19	1.4/2.7	
RAH8025B2		100~125	50/60	0.13	13/11	1700/2200	21/26	24/32	14/19	1.4/2.7	