





Dimensions Drawing

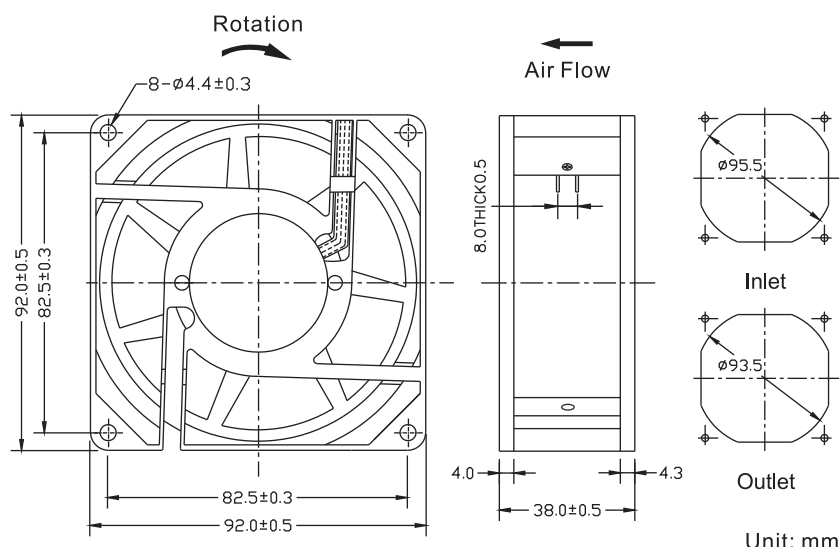

General Specification

- Impeller : PBT UL94V-0 Reinforced Plastic
- Frame : Aluminum Alloy
- Terminals : 0.5mm
- Lead Wire : AWG#22 UL 1430(Optional)
- Motor : Shaded Pole Induction Motor
- Operation Temperature : $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$
35%~85%RH
- Storage Temperature : $-40^{\circ}\text{C} \sim +75^{\circ}\text{C}$
35%~85%RH
-    (220~240V)
-  (100~125V)

Performance Curves

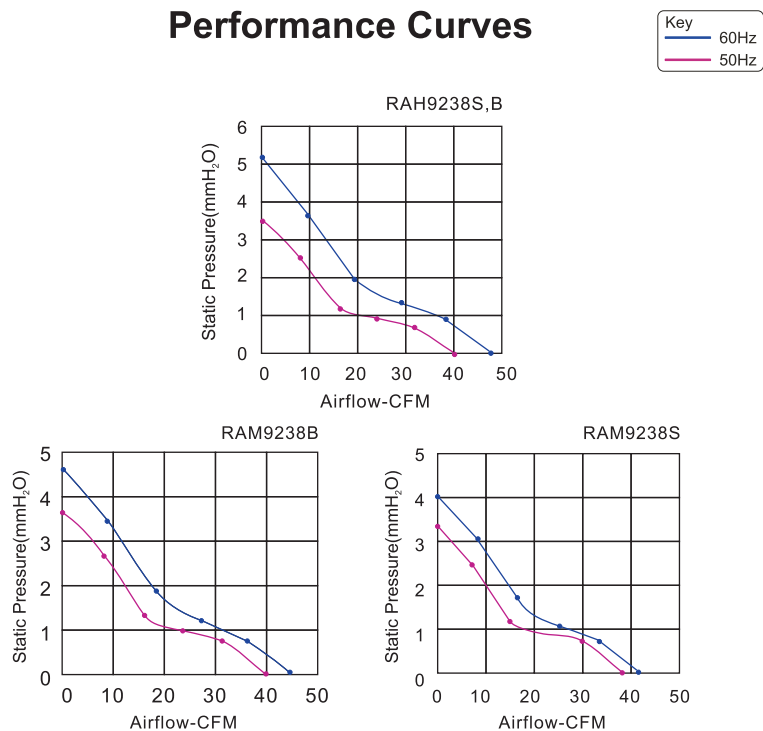

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH ₂ O)	Weight Gram
								M ³ /hr	CFM		
RAH9238S1	Sleeve	220~240	50/60	0.10/0.08	17/13	2350/2750	26/31	66/78	39/46	3.6/5.2	350
RAM9238S1		220~240	50/60	0.07/0.06	11/8	2200/2500	25/27	63/70	37/41	3.3/4.0	
RAH9238S2		100~125	50/60	0.23/0.18	17/13	2350/2750	26/31	66/78	39/46	3.6/5.2	
RAM9238S2		100~125	50/60	0.12/0.09	9/7	2200/2500	25/27	63/70	37/41	3.3/4.0	
RAH9238B1	Ball	220~240	50/60	0.10/0.08	17/13	2350/2750	27/32	66/78	39/46	3.6/5.2	
RAM9238B1		220~240	50/60	0.07/0.06	11/8	2250/2600	26/28	65/75	38/44	3.7/4.6	
RAH9238B2		100~125	50/60	0.23/0.18	17/13	2350/2750	27/32	66/78	39/46	3.6/5.2	
RAM9238B2		100~125	50/60	0.12/0.09	9/7	2250/2600	26/28	65/75	38/44	3.7/4.6	