




Dimensions Drawing

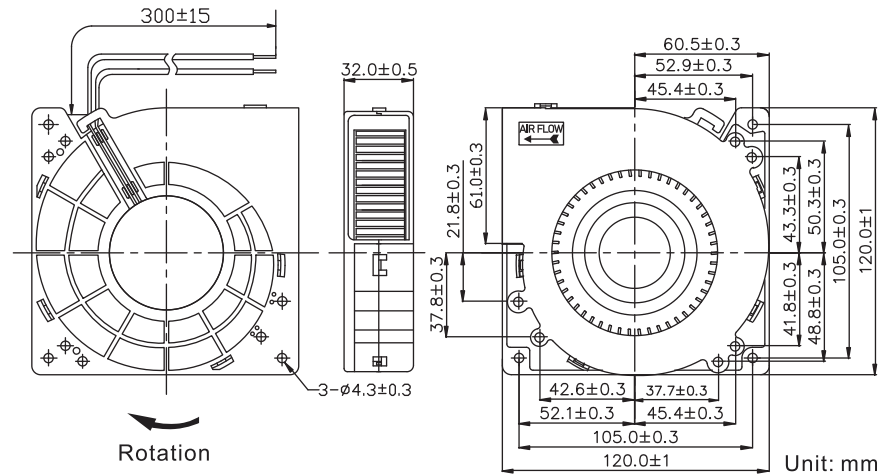

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

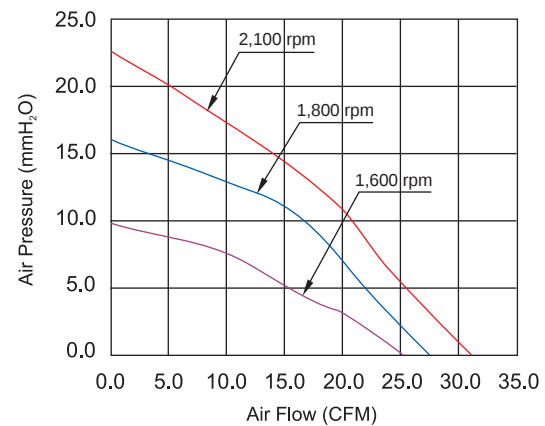

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RBH1232B	Ball	12	6.0~13.8	0.87	2,100	31.6	23.1	51	•	•			240
RBM1232B			6.0~13.8	0.60	1,800	26.8	16.4	47	•	•			
RBL1232B			6.0~13.8	0.49	1,600	25.0	9.6	45	•	•			
RBH1232B2		24	12.0~27.6	0.50	2,100	31.6	23.1	51	•	•			
RBM1232B2			12.0~27.6	0.35	1,800	26.8	16.4	47	•	•			
RBL1232B2			12.0~27.6	0.28	1,600	25.0	9.6	45	•	•			
RBH1232B4		48	24.0~55.2	0.30	2,100	31.6	23.1	51	•	•			
RBM1232B4			24.0~55.2	0.20	1,800	26.8	16.4	47	•	•			
RBL1232B4			24.0~55.2	0.15	1,600	25.0	9.6	45	•	•			