




Dimensions Drawing

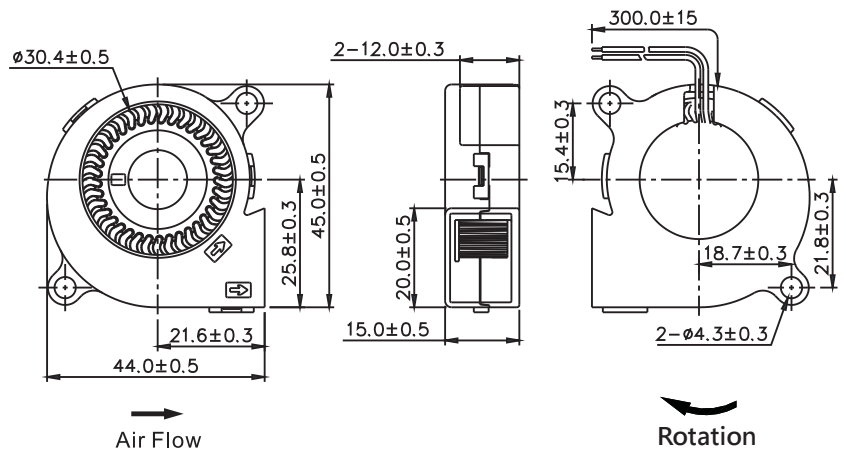

Unit: mm

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

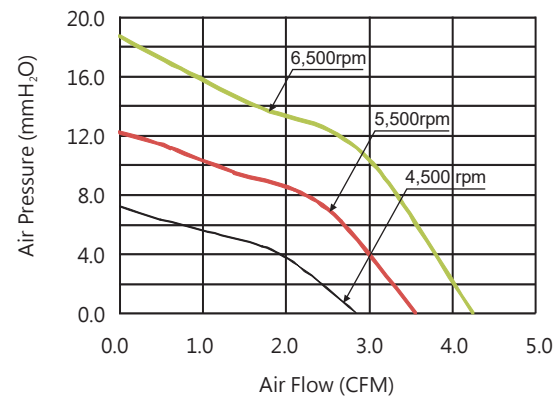

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RBH4515S1	Sleeve	12	6.0~13.8	0.18	6,500	4.2	18.7	39	•	•		•	16
RBM4515S1			6.0~13.8	0.12	5,500	3.5	12.2	34	•	•		•	
RBL4515S1			8.0~13.8	0.08	4,500	2.8	7.2	30	•	•		•	
RBH4515B1	Ball		6.0~13.8	0.18	6,500	4.2	18.7	39	•	•		•	
RBM4515B1			6.0~13.8	0.12	5,500	3.5	12.2	34	•	•		•	
RBL4515B1			8.0~13.8	0.08	4,500	2.8	7.2	30	•	•		•	