




Dimensions Drawing

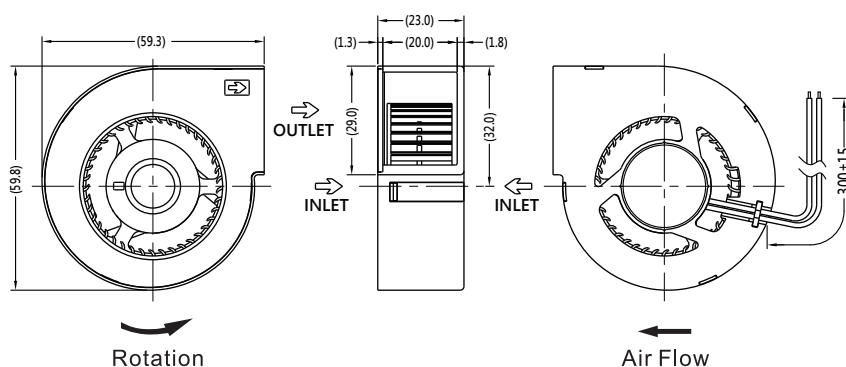

Unit: mm

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

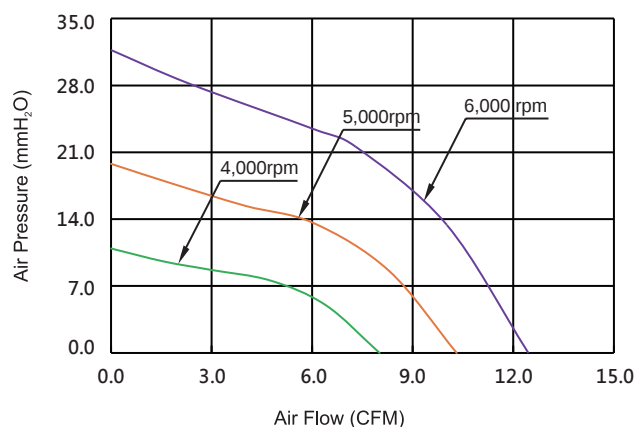

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RBH6023S1	Sleeve	12	6.0~13.8	0.55	6,000	12.5	31.7	50	•	•		•	45
RBM6023S1			6.0~13.8	0.32	5,000	10.3	19.8	44	•	•		•	
RBL6023S1			8.0~13.8	0.16	4,000	8.0	10.9	37	•	•		•	
RBH6023B1	Ball		6.0~13.8	0.55	6,000	12.5	31.7	50	•	•		•	
RBM6023B1			6.0~13.8	0.32	5,000	10.3	19.8	44	•	•		•	
RBL6023B1			8.0~13.8	0.16	4,000	8.0	10.9	37	•	•		•	