




Dimensions Drawing

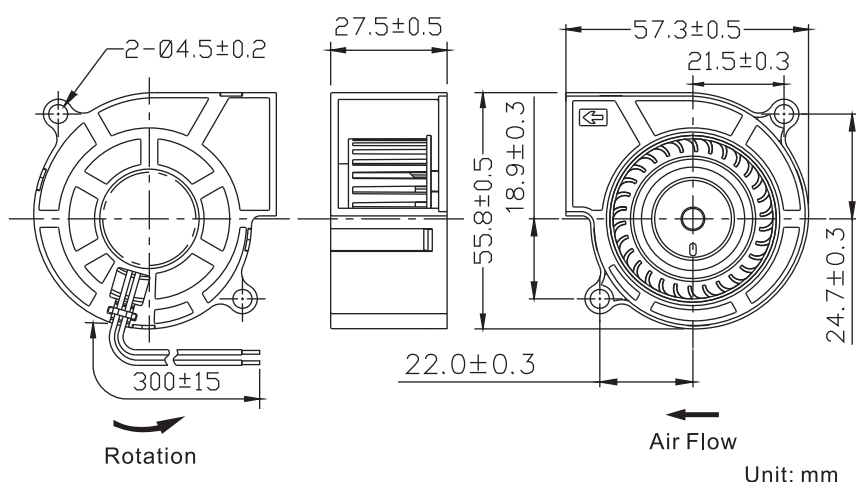

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

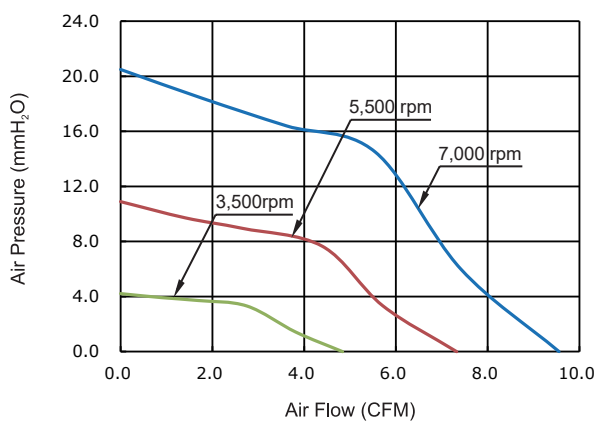

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RBH6028S1	Sleeve	12	6.0~13.8	0.50	7,000	9.5	20.5	46	•	•		•	44
RBM6028S1			6.0~13.8	0.30	5,500	7.3	10.9	40	•	•		•	
RBL6028S1			8.0~13.8	0.10	3,500	4.8	4.2	29	•	•		•	
RBH6028B1	Ball		6.0~13.8	0.50	7,000	9.5	20.5	46	•	•		•	
RBM6028B1			6.0~13.8	0.30	5,500	7.3	10.9	40	•	•		•	
RBL6028B1			8.0~13.8	0.10	3,500	4.8	4.2	29	•	•		•	