




Dimensions Drawing

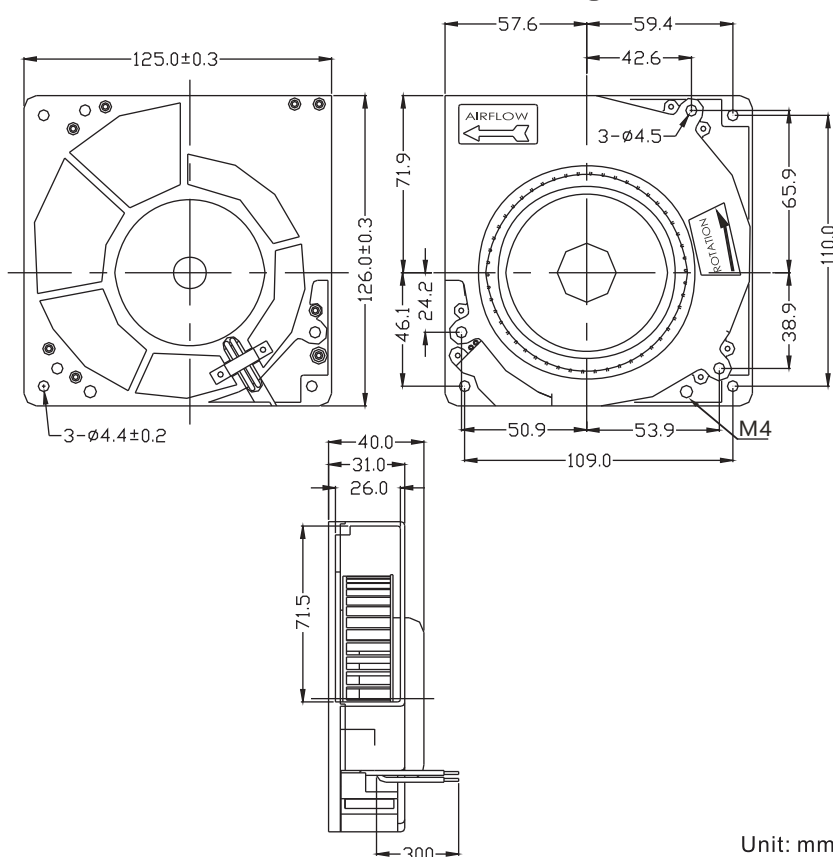

Unit: mm


General Specification

- Impeller : PA6 UL94V-0 Reinforced Plastic
- Frame : Aluminum Alloy
- Lead Wire : AWG#24 UL 1430(Optional)
- Motor : Capactor-Run Induction Motor
- Operation Temperature : -10°C~+70°C
35%~85%RH
- Storage Temperature : -40°C~75°C
35%~85%RH

●   (220~240V)

 (100~125V)

Performance Curves

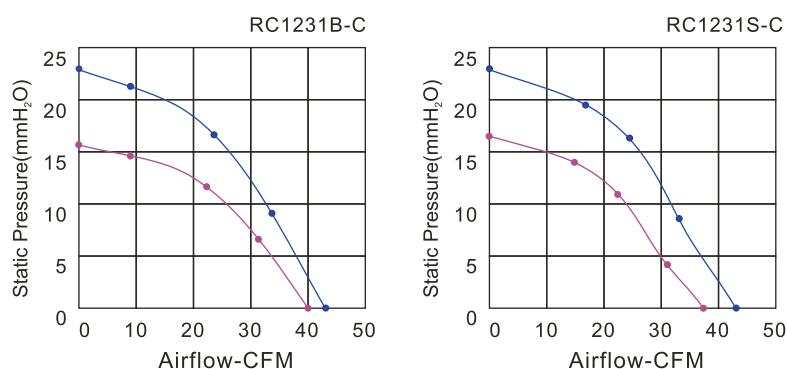

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH ₂ O)	Weight Gram
								M ³ /hr	CFM		
RCH1231S1-C	Sleeve	220~240	50/60	0.13/0.13	27/28	2600/3000	54/57	63/71	37/42	15.4/22	668
RCH1231S2-C		100~125	50/60	0.27/0.25	27/28	2600/3000	54/57	63/71	37/42	15.4/22	
RCH1231B1-C	Ball	220~240	50/60	0.13/0.13	26/27	2750/3050	55/57	68/73	40/43	15.8/22.6	
RCH1231B2-C		100~125	50/60	0.27/0.29	26/27	2750/3050	55/57	68/73	40/43	15.8/22.6	