




Dimensions Drawing

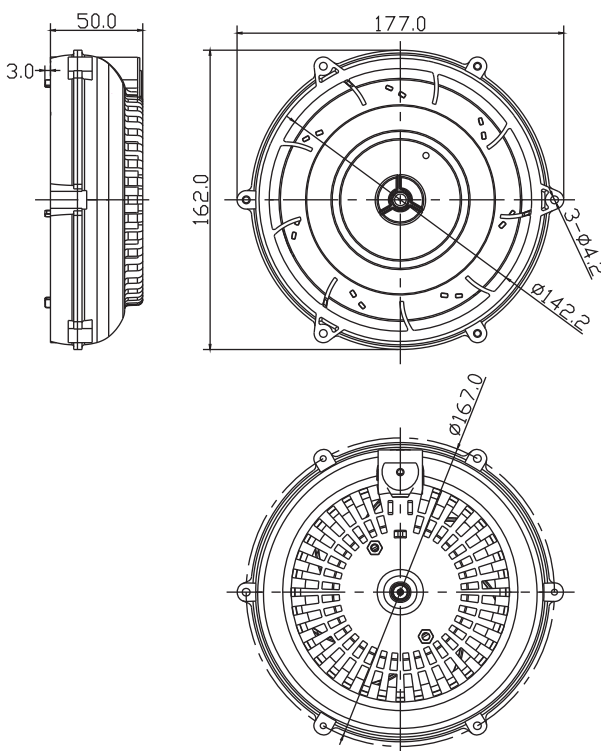

Unit: mm

General Specification

- Impeller : PBT UL94V-0 Reinforced Plastic
- Frame : PBT UL94V-0 Reinforced Plastic
- Lead Wire : SPT-2(W)OR Customize Design(Optional)
- Motor : Shaded Pole Induction Motor
- Operation Temperature : -10°C~+70°C
35%~85%RH
- Storage Temperature : -40°C~75°C
35%~85%RH





(220~240V)



(100~125V)

Performance Curves

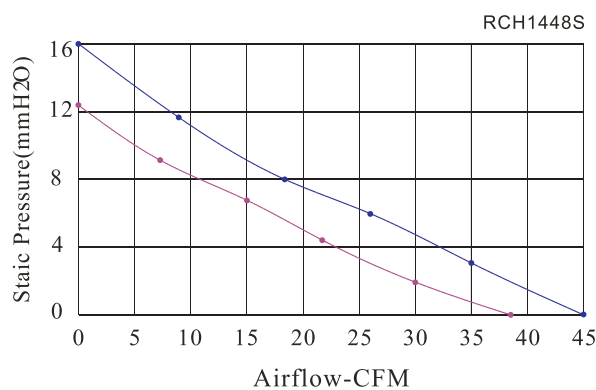

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH ₂ O)	Weight Gram
								M ³ /hr	CFM		
RCH1448S1	Sleeve	220~240	50	0.18	26	2500	46	64.6	38	12.8	570
RCH1448S2		100~125	60	0.35	26	2950	49	76.5	45	16	