




Dimensions Drawing

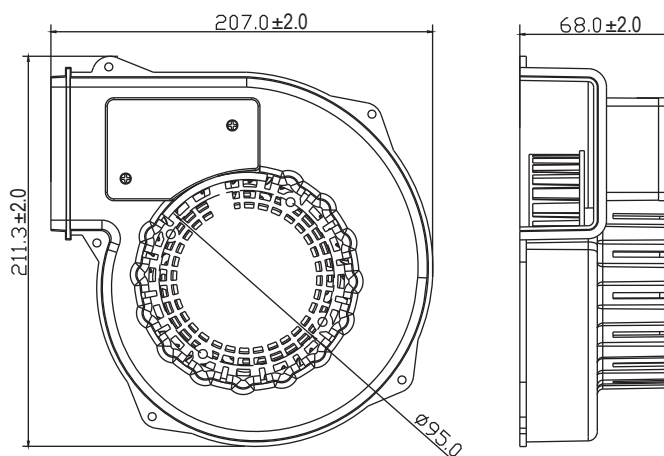

Unit: mm

General Specification

- Impeller : PP UL94V-0 Reinforced Plastic
- Frame : PP UL94V-0 Reinforced Plastic
- Lead Wire : SPT-2(W)OR Customize Design(Optional)
- Motor : Capacitor-Run Induction Motor
- Operation Temperature : $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$
35%~85%RH
- Storage Temperature : $-40^{\circ}\text{C} \sim 75^{\circ}\text{C}$
35%~85%RH





(220~240V)



(100~125V)

Performance Curves

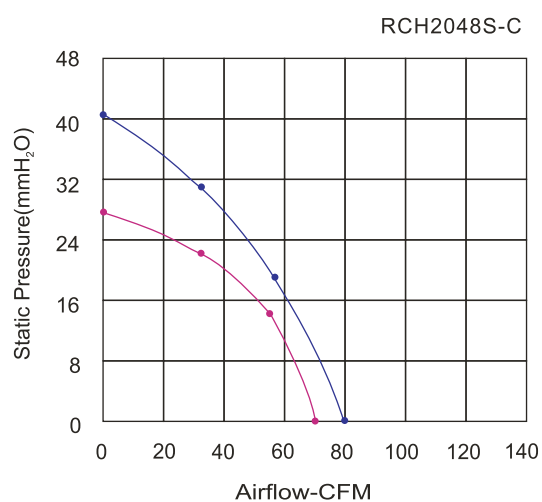

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH ₂ O)	Weight Gram
								M ³ /hr	CFM		
RCH2048S1-C	Sleeve	220~240	50	0.35	74	2450	58	119	70	27	896
RCH2048S2-C		100~125	60	0.77	81	2800	60	136	80	41	
RCH2048S2-C1		100~125	60	0.77	81	2800	60	136	80	41	