


Ø 150 x 68 mm

C Series



Dimensions Drawing

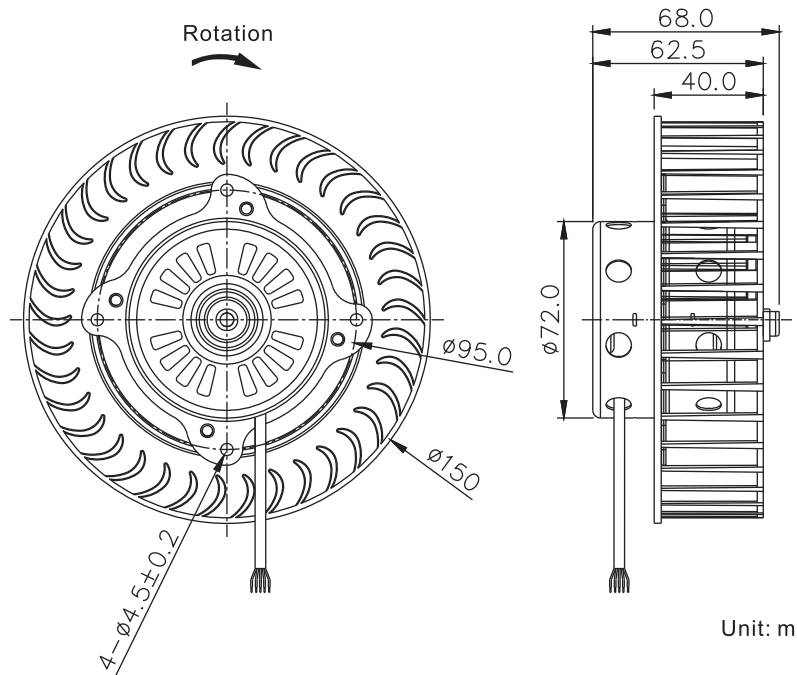


Unit: mm

General Specification

- Impeller : PP UL94V-0 Reinforced Plastic
- Frame : PP UL94V-0 Reinforced Plastic
- Lead Wire : UL 1430 20# OR Customize Design(Optional)
- Motor : Capacitor-Run Induction Motor
- Operation Temperature : -10°C~+70°C
35%~85%RH
- Storage Temperature : -40°C~75°C
35%~85%RH



Performance Curves

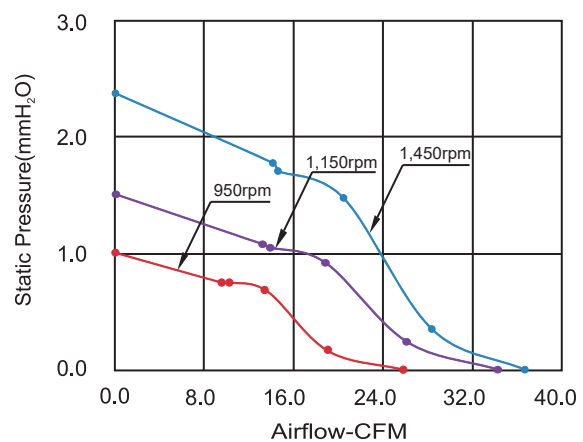

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH ₂ O)	Weight Gram
								M ³ /hr	CFM		
RCH2048S2-C2	Sleeve	100~125	60	0.35	40	1450(H)	55	93	36	2.4	630
		100~125	60	0.30	35	1150(M)	53	90	34	1.5	
		100~125	60	0.25	30	950(L)	51	87	25	1.0	

- All readings are typical values at rated voltage.
- Specifications are subjected to change without prior notice.