




## Dimensions Drawing

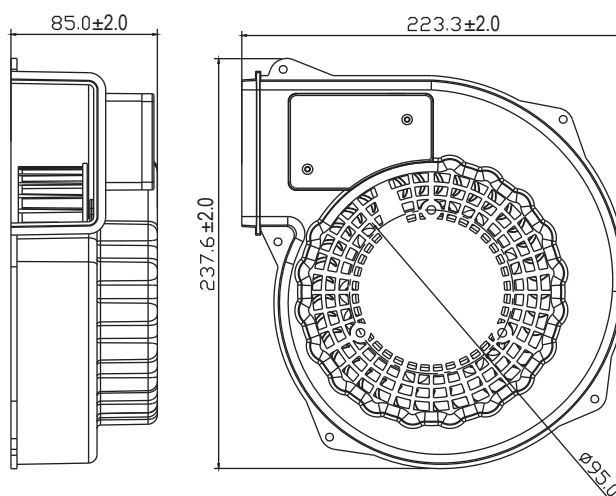

Unit: mm

## General Specification

- Impeller : PP UL94V-0 Reinforced Plastic
- Frame : PP UL94V-0 Reinforced Plastic
- Lead Wire : SPT-2(W)OR Customize Design(Optional)
- Motor : Capacitor-Run Induction Motor
- Operation Temperature : -10°C~+70°C  
35%~85%RH
- Storage Temperature : -40°C~75°C  
35%~85%RH




(220~240V)



(100~125V)

## Performance Curves

RCH2258S-C

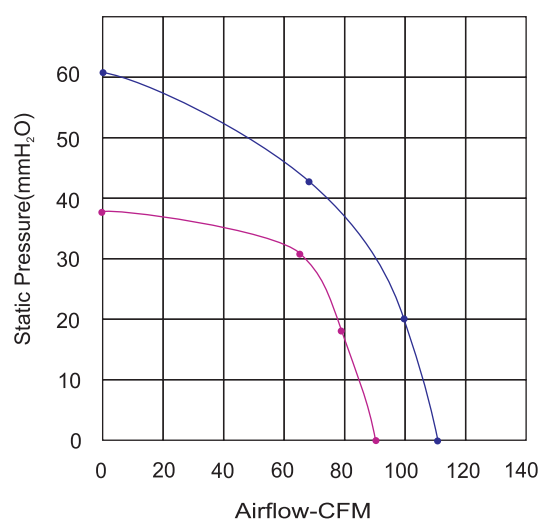

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Weight Gram
								M <sup>3</sup> /hr	CFM		
RCH2258S1-C	Sleeve	220~240	50	0.45	96	2350	58	153	90	38	1210
RCH2258S2-C		100~125	60	1.2	129	2650	61	187	110	61	