

Ø 165 x 78 mm

C Series




## General Specification

- Impeller : PP UL94V-0 Reinforced Plastic
- Lead Wire : UL 1430 20# OR Customize Design(Optional)
- Motor : Capacitor-Run Induction Motor
- Operation Temperature : -10°C~+70°C  
35%~85%RH
- Storage Temperature : -40°C~75°C  
35%~85%RH




## Dimensions Drawing

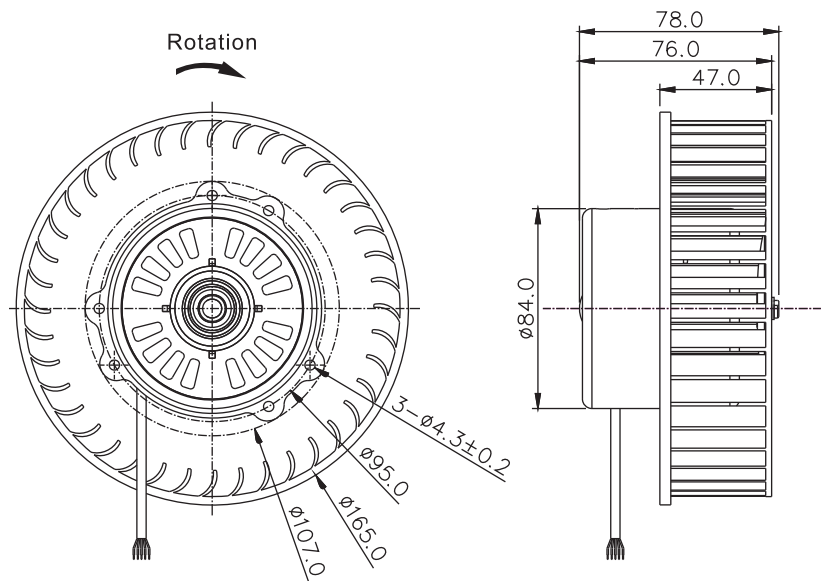

Unit: mm

## Performance Curves

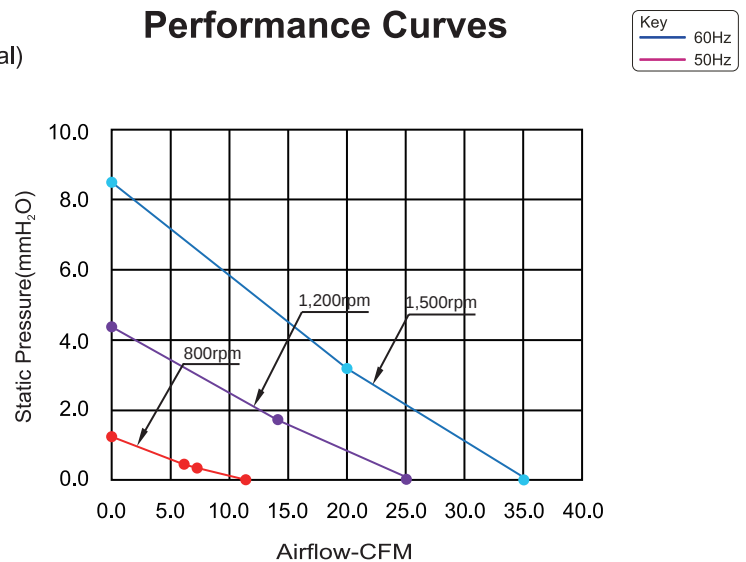

| Model        | Bearing System | Voltage VAC | Freq. Hz | Current A | Power W | Speed RPM | Noise dBA | Air Flow           |     | Static Pressure (mmH <sub>2</sub> O) | Weight Gram |
|--------------|----------------|-------------|----------|-----------|---------|-----------|-----------|--------------------|-----|--------------------------------------|-------------|
|              |                |             |          |           |         |           |           | M <sup>3</sup> /hr | CFM |                                      |             |
| RCH2258S2-C2 | Sleeve         | 100~125     | 60       | 0.45      | 50      | 1500(H)   | 37        | 59                 | 35  | 8.5                                  | 1010        |
|              |                | 100~125     | 60       | 0.40      | 40      | 1200(M)   | 30        | 42                 | 25  | 4.4                                  |             |
|              |                | 100~125     | 60       | 0.35      | 35      | 800(L)    | 22        | 19                 | 11  | 1.2                                  |             |

- All readings are typical values at rated voltage.
- Specifications are subjected to change without prior notice.