





Dimensions Drawing

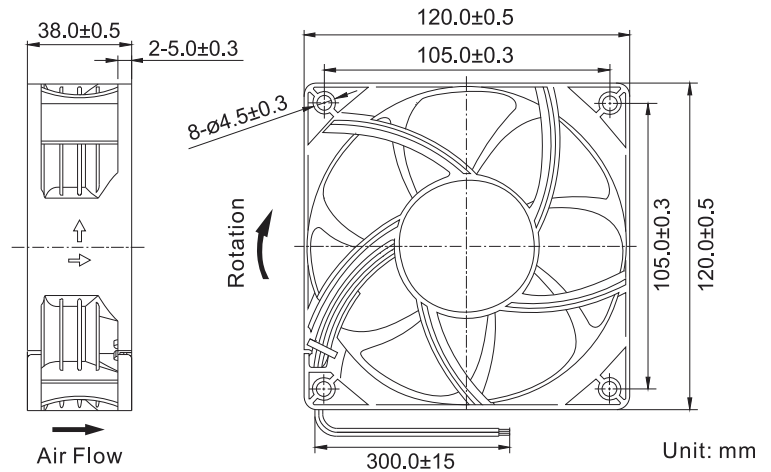

Performance Curves

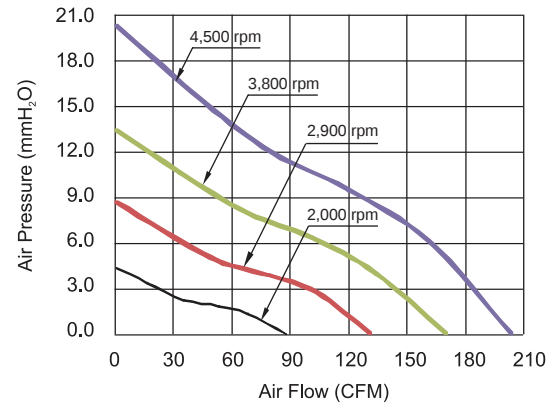

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type

(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH



Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	9
RDH12038S1	Sleeve	12	6.0~13.8	1.30	3,800	169.6	13.4	54	•	•		•	290
RDM12038S1			6.0~13.8	0.58	2,900	130.4	8.8	46	•	•		•	
RDL12038S1			6.0~13.8	0.28	2,000	87.7	4.4	35	•	•		•	
RDD12038B1	Ball		6.0~13.8	2.30	4,500	203.7	20.3	57	•	•		•	
RDH12038B1			6.0~13.8	1.30	3,800	169.6	13.4	54	•	•		•	
RDM12038B1			6.0~13.8	0.58	2,900	130.4	8.8	46	•	•		•	
RDL12038B1			6.0~13.8	0.28	2,000	87.7	4.4	35	•	•		•	
RDH12038S2	Sleeve		12.0~27.6	0.60	3,800	169.6	13.4	54	•	•		•	
RDM12038S2			12.0~27.6	0.40	2,900	130.4	8.8	46	•	•		•	
RDL12038S2			12.0~27.6	0.30	2,000	87.7	4.4	35	•	•		•	
RDD12038B2	Ball		12.0~27.6	1.20	4,500	203.7	20.3	57	•	•		•	
RDH12038B2			12.0~27.6	0.60	3,800	169.6	13.4	54	•	•		•	
RDM12038B2			12.0~27.6	0.40	2,900	130.4	8.8	46	•	•		•	
RDL12038B2			12.0~27.6	0.30	2,000	87.7	4.4	35	•	•		•	
RDH12038S4	Sleeve	48	24.0~55.2	0.35	3,800	169.6	13.4	54	•	•		•	
RDM12038S4			24.0~55.2	0.30	2,900	130.4	8.8	46	•	•		•	
RDL12038S4			24.0~55.2	0.20	2,000	87.7	4.4	35	•	•		•	
RDD12038B4	Ball		24.0~55.2	0.60	4,500	203.7	20.3	57	•	•		•	
RDH12038B4			24.0~55.2	0.35	3,800	169.6	13.4	54	•	•		•	
RDM12038B4			24.0~55.2	0.30	2,900	130.4	8.8	46	•	•		•	
RDL12038B4			24.0~55.2	0.20	2,000	87.7	4.4	35	•	•		•	