




Dimensions Drawing

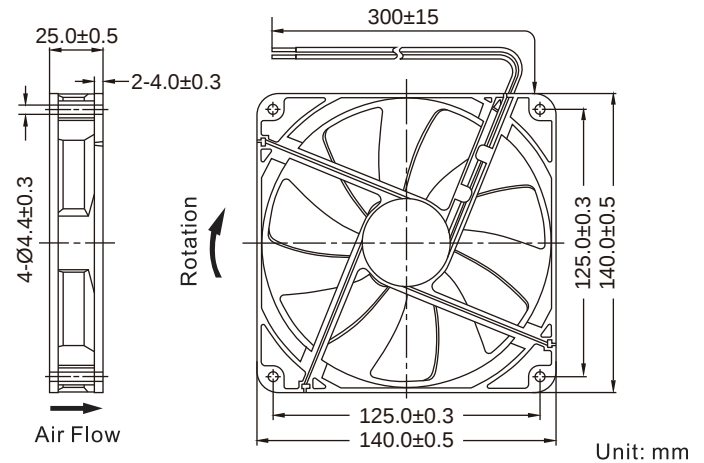


General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C
35%~85%RH
- Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

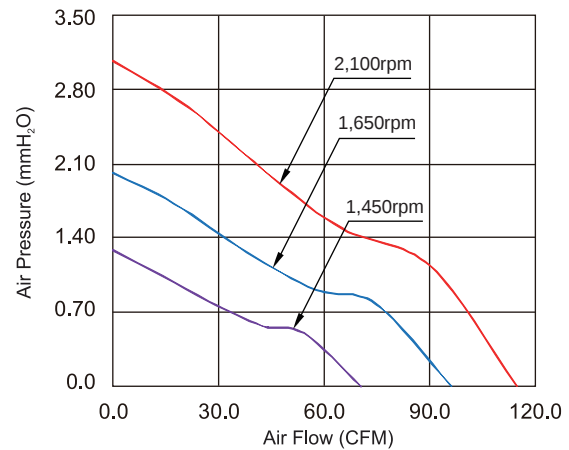

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RDH1425S1	Sleeve	12	6.0~13.8	0.40	2,100	114.6	3.1	40.6	•	•		•	125
RDM1425S1			6.0~13.8	0.30	1,650	95.5	2.0	35.8	•	•		•	
RDL1425S1			6.0~13.8	0.20	1,450	70.3	1.3	20.3	•	•		•	
RDH1425B1	Ball		6.0~13.8	0.40	2,100	114.6	3.1	40.6	•	•		•	
RDM1425B1			6.0~13.8	0.30	1,650	95.5	2.0	35.8	•	•		•	
RDL1425B1			6.0~13.8	0.20	1,450	70.3	1.3	20.3	•	•		•	