





Dimensions Drawing

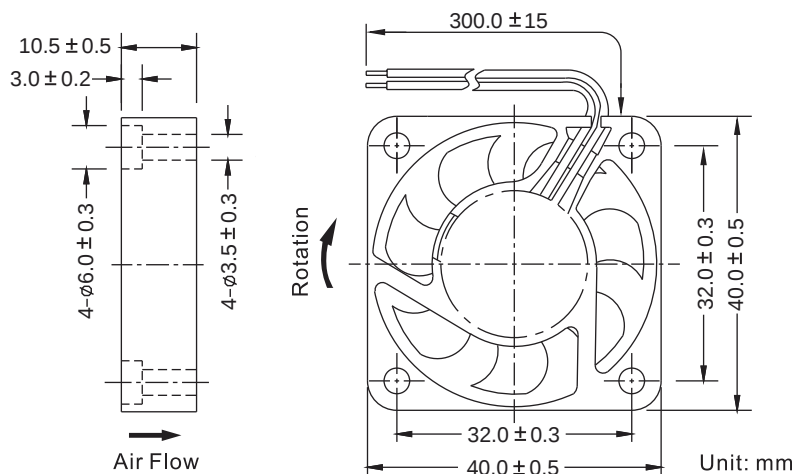

General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C
35%~85%RH
- Storage Temperature : -40°C~80°C
35%~85%RH
-

Performance Curves

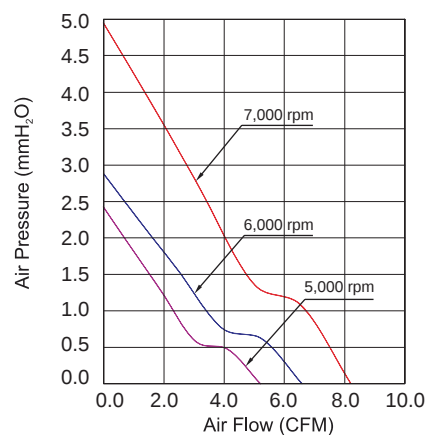

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RDH4010S5(7B)	Sleeve	5	3.5~5.75	0.20	7,000	8.1	4.9	30	•	•			16
RDM4010S5(7B)			3.5~5.75	0.16	6,000	6.5	2.8	28	•	•			
RDL4010S5(7B)			3.5~5.75	0.13	5,000	5.3	2.4	24	•	•			
RDH4010B5(7B)	Ball		3.5~5.75	0.20	7,000	8.1	4.9	30	•	•			
RDM4010B5(7B)			3.5~5.75	0.16	6,000	6.5	2.8	28	•	•			
RDL4010B5(7B)			3.5~5.75	0.13	5,000	5.3	2.4	24	•	•			
RDH4010S1(7B)	Sleeve	12	6.0~13.8	0.09	7,000	8.1	4.9	30	•	•			
RDM4010S1(7B)			6.0~13.8	0.07	6,000	6.5	2.8	28	•	•			
RDL4010S1(7B)			7.0~13.8	0.06	5,000	5.3	2.4	24	•	•			
RDH4010B1(7B)	Ball		6.0~13.8	0.09	7,000	8.1	4.9	30	•	•			
RDM4010B1(7B)			6.0~13.8	0.07	6,000	6.5	2.8	28	•	•			
RDL4010B1(7B)			7.0~13.8	0.06	5,000	5.3	2.4	24	•	•			
RDH4010S2(7B)	Sleeve	24	12.0~27.6	0.09	7,000	8.1	4.9	30	•	•			
RDM4010S2(7B)			12.0~27.6	0.06	6,000	6.5	2.8	28	•	•			
RDL4010S2(7B)			16.0~27.6	0.05	5,000	5.3	2.4	24	•	•			
RDH4010B2(7B)	Ball		12.0~27.6	0.09	7,000	8.1	4.9	30	•	•			
RDM4010B2(7B)			12.0~27.6	0.06	6,000	6.5	2.8	28	•	•			
RDL4010B2(7B)			16.0~27.6	0.05	5,000	5.3	2.4	24	•	•			