




Dimensions Drawing

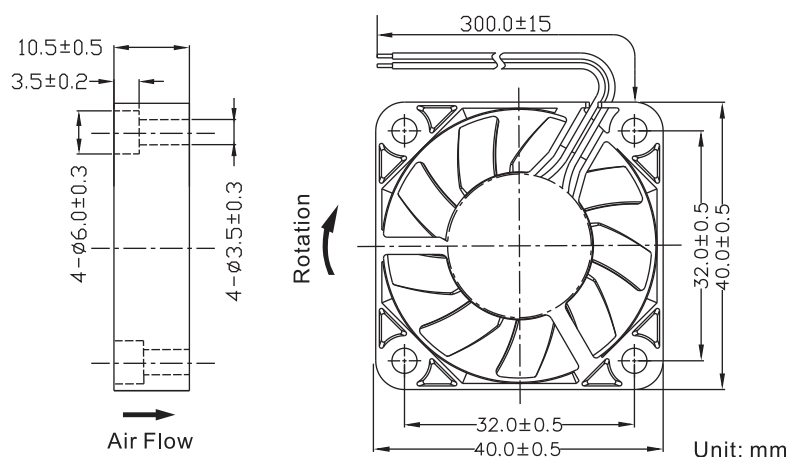

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

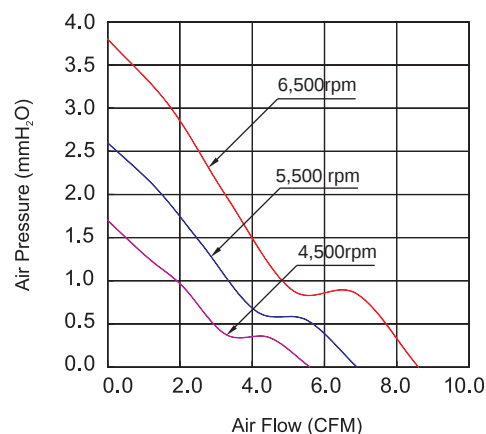

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RDH4010S5(9B)	Sleeve	5	3.5~5.75	0.20	6,500	8.6	3.8	32	•	•			16
RDM4010S5(9B)			3.5~5.75	0.16	5,500	6.9	2.6	28	•	•			
RDL4010S5(9B)			3.5~5.75	0.13	4,500	5.6	1.7	25	•	•			
RDH4010B5(9B)	Ball		3.5~5.75	0.20	6,500	8.6	3.8	32	•	•			
RDM4010B5(9B)			3.5~5.75	0.16	5,500	6.9	2.6	28	•	•			
RDL4010B5(9B)			3.5~5.75	0.13	4,500	5.6	1.7	25	•	•			
RDH4010S1(9B)	Sleeve	12	6.0~13.8	0.09	6,500	8.6	3.8	32	•	•			
RDM4010S1(9B)			6.0~13.8	0.07	5,500	6.9	2.6	28	•	•			
RDL4010S1(9B)			7.0~13.8	0.06	4,500	5.6	1.7	25	•	•			
RDH4010B1(9B)	Ball		6.0~13.8	0.09	6,500	8.6	3.8	32	•	•			
RDM4010B1(9B)			6.0~13.8	0.07	5,500	6.9	2.6	28	•	•			
RDL4010B1(9B)			7.0~13.8	0.06	4,500	5.6	1.7	25	•	•			
RDH4010S2(9B)	Sleeve	24	12.0~27.6	0.09	6,500	8.6	3.8	32	•	•			
RDM4010S2(9B)			12.0~27.6	0.06	5,500	6.9	2.6	28	•	•			
RDL4010S2(9B)			16.0~27.6	0.05	4,500	5.6	1.7	25	•	•			
RDH4010B2(9B)	Ball		12.0~27.6	0.09	6,500	8.6	3.8	32	•	•			
RDM4010B2(9B)			12.0~27.6	0.06	5,500	6.9	2.6	28	•	•			
RDL4010B2(9B)			16.0~27.6	0.05	4,500	5.6	1.7	25	•	•			