




Dimensions Drawing

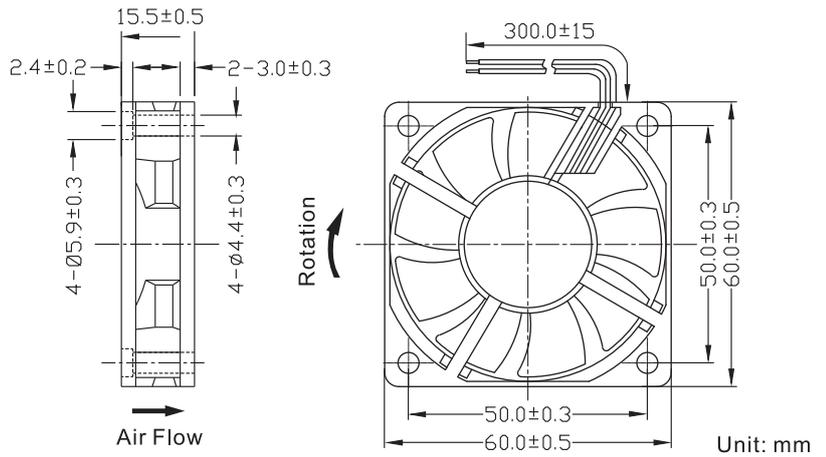

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type

(+) : Red (-) : Black


Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH

(5V 12V)

(24V)

Performance Curves

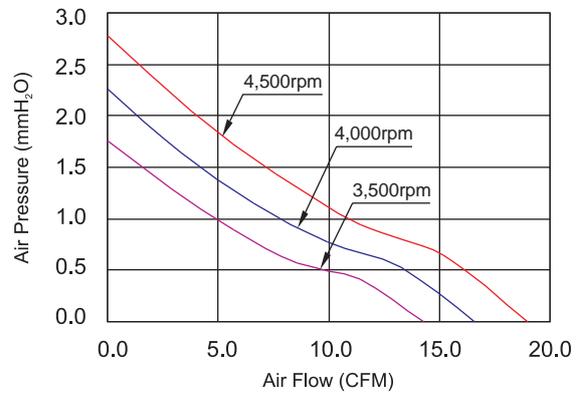

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RDH6015S5(9B)	Sleeve	5	3.5~5.75	0.40	4,500	19.3	2.8	32	•	•			34
RDM6015S5(9B)			3.5~5.75	0.25	4,000	16.6	2.3	30	•	•			
RDL6015S5(9B)			3.5~5.75	0.15	3,500	14.3	1.8	26	•	•			
RDH6015B5(9B)	Ball		3.5~5.75	0.40	4,500	19.3	2.8	32	•	•			
RDM6015B5(9B)			3.5~5.75	0.25	4,000	16.6	2.3	30	•	•			
RDL6015B5(9B)			3.5~5.75	0.15	3,500	14.3	1.8	26	•	•			
RDH6015S1(9B)	Sleeve	12	6.0~13.8	0.17	4,500	19.3	2.8	32	•	•	•	•	
RDM6015S1(9B)			6.0~13.8	0.15	4,000	16.6	2.3	30	•	•	•	•	
RDL6015S1(9B)			6.0~13.8	0.11	3,500	14.3	1.8	26	•	•	•	•	
RDH6015B1(9B)	Ball		6.0~13.8	0.17	4,500	19.3	2.8	32	•	•	•	•	
RDM6015B1(9B)			6.0~13.8	0.15	4,000	16.6	2.3	30	•	•	•	•	
RDL6015B1(9B)			6.0~13.8	0.11	3,500	14.3	1.8	26	•	•	•	•	
RDH6015S2(9B)	Sleeve	24	12.0~27.6	0.15	4,500	19.3	2.8	32	•	•			
RDM6015S2(9B)			12.0~27.6	0.10	4,000	16.6	2.3	30	•	•			
RDL6015S2(9B)			12.0~27.6	0.08	3,500	14.3	1.8	26	•	•			
RDH6015B2(9B)	Ball		12.0~27.6	0.15	4,500	19.3	2.8	32	•	•			
RDM6015B2(9B)			12.0~27.6	0.10	4,000	16.6	2.3	30	•	•			
RDL6015B2(9B)			12.0~27.6	0.08	3,500	14.3	1.8	26	•	•			

● All readings are typical values at rated voltage.
● Specifications are subjected to change without prior notice.