




Dimensions Drawing

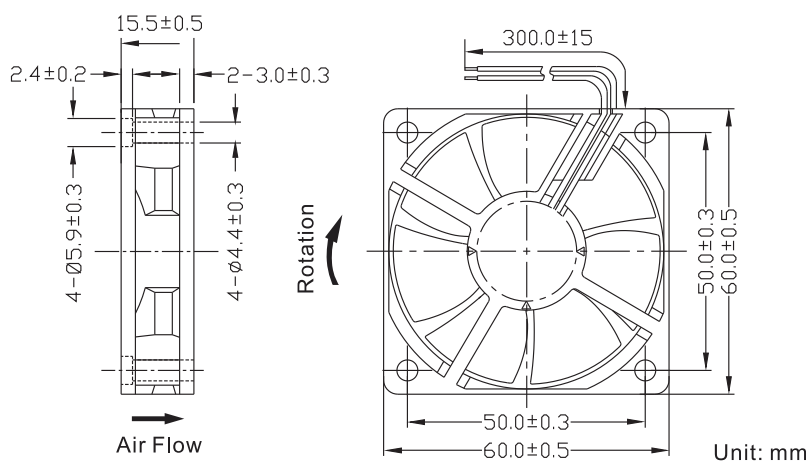

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH

 (5V 12V)
 (24V)

Performance Curves

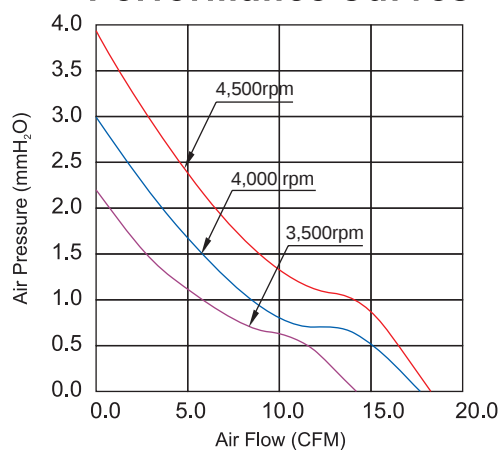

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RDH6015S5(7B)	Sleeve	5	3.5~5.75	0.40	4,500	18.6	3.9	35	•	•			34
RDM6015S5(7B)			3.5~5.75	0.25	4,000	17.0	3.0	32	•	•			
RDL6015S5(7B)			3.5~5.75	0.15	3,500	14.4	2.2	29	•	•			
RDH6015B5(7B)	Ball		3.5~5.75	0.40	4,500	18.6	3.9	35	•	•			
RDM6015B5(7B)			3.5~5.75	0.25	4,000	17.0	3.0	32	•	•			
RDL6015B5(7B)			3.5~5.75	0.15	3,500	14.4	2.2	29	•	•			
RDH6015S1(7B)	Sleeve	12	6.0~13.8	0.17	4,500	18.6	3.9	35	•	•	•	•	
RDM6015S1(7B)			6.0~13.8	0.15	4,000	17.0	3.0	32	•	•	•	•	
RDL6015S1(7B)			6.0~13.8	0.11	3,500	14.4	2.2	29	•	•	•	•	
RDH6015B1(7B)	Ball		6.0~13.8	0.17	4,500	18.6	3.9	35	•	•	•	•	
RDM6015B1(7B)			6.0~13.8	0.15	4,000	17.0	3.0	32	•	•	•	•	
RDL6015B1(7B)			6.0~13.8	0.11	3,500	14.4	2.2	29	•	•	•	•	
RDH6015S2(7B)	Sleeve	24	12.0~27.6	0.15	4,500	18.6	3.9	35	•	•			
RDM6015S2(7B)			12.0~27.6	0.10	4,000	17.0	3.0	32	•	•			
RDL6015S2(7B)			12.0~27.6	0.08	3,500	14.4	2.2	29	•	•			
RDH6015B2(7B)	Ball		12.0~27.6	0.15	4,500	18.6	3.9	35	•	•			
RDM6015B2(7B)			12.0~27.6	0.10	4,000	17.0	3.0	32	•	•			
RDL6015B2(7B)			12.0~27.6	0.08	3,500	14.4	2.2	29	•	•			