




Dimensions Drawing

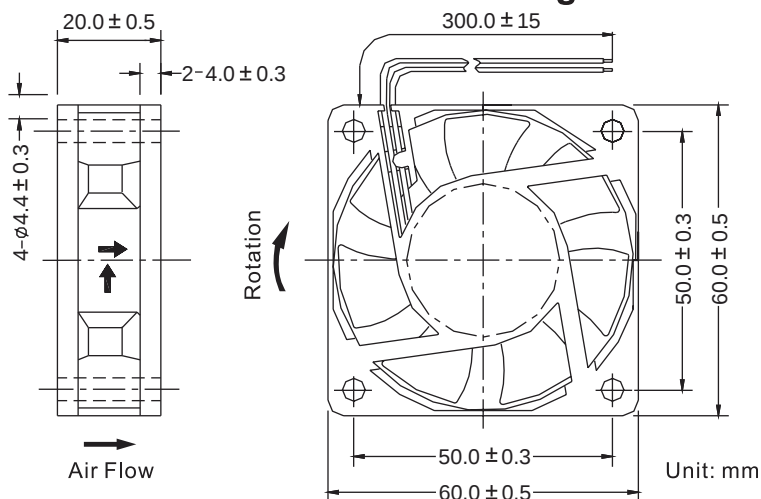

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type

(+) : Red (-) : Black


Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH

UL[®] US (12V)

CE VDE (24V)

Performance Curves

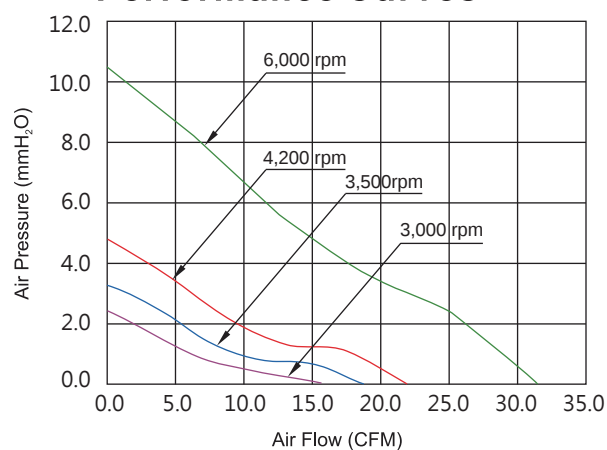

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RDH6020S	Sleeve	12	6.0~13.8	0.16	4,200	22.3	4.7	35	•	•	•	•	50
RDM6020S			6.0~13.8	0.12	3,500	18.5	3.3	29	•	•	•	•	
RDL6020S			6.0~13.8	0.08	3,000	15.7	2.4	26	•	•	•	•	
RDD6020B	Ball		6.0~13.8	0.30	6,000	31.1	10.3	45.9	•	•	•	•	
RDH6020B			6.0~13.8	0.16	4,200	22.3	4.7	35	•	•	•	•	
RDM6020B			6.0~13.8	0.12	3,500	18.5	3.3	29	•	•	•	•	
RDL6020B			6.0~13.8	0.08	3,000	15.7	2.4	26	•	•	•	•	
RDH6020S2	Sleeve	24	12.0~27.6	0.13	4,200	22.3	4.7	35	•	•			50
RDM6020S2			12.0~27.6	0.10	3,500	18.5	3.3	29	•	•			
RDL6020S2			12.0~27.6	0.08	3,000	15.7	2.4	26	•	•			
RDH6020B2	Ball		12.0~27.6	0.13	4,200	22.3	4.7	35	•	•			
RDM6020B2			12.0~27.6	0.10	3,500	18.5	3.3	29	•	•			
RDL6020B2			12.0~27.6	0.08	3,000	15.7	2.4	26	•	•			