




Dimensions Drawing

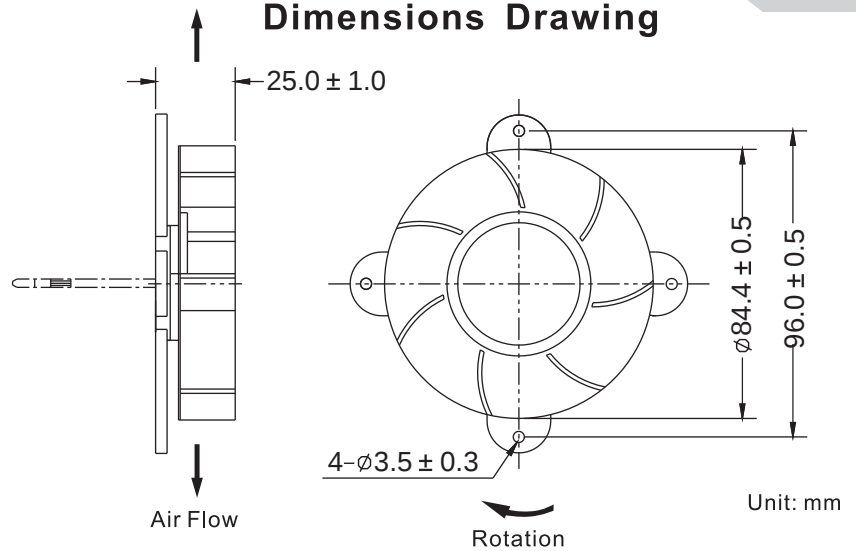

General Specification


Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type

(+) : Red (-) : Black

Operation Temperature : $-10^{\circ}\text{C} \sim 70^{\circ}\text{C}$
35%~85%RH

Storage Temperature : $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
35%~85%RH

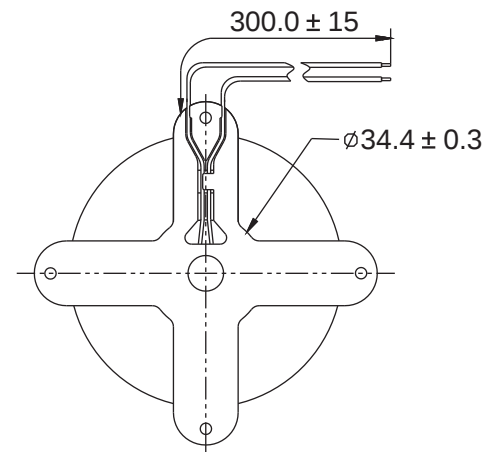

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RDH9025SBPT	Sleeve	12	6.0~13.8	0.35	2,500	---	---	35	•	•			75
RDM9025SBPT			6.0~13.8	0.25	2,100	---	---	30	•	•			
RDL9025SBPT			6.0~13.8	0.20	1,800	---	---	27	•	•			
RDH9025SAPT			6.0~13.8	0.35	2,500	---	---	35	•	•			
RDM9025SAPT			6.0~13.8	0.25	2,100	---	---	30	•	•			
RDL9025SAPT			6.0~13.8	0.20	1,800	---	---	27	•	•			