




Dimensions Drawing

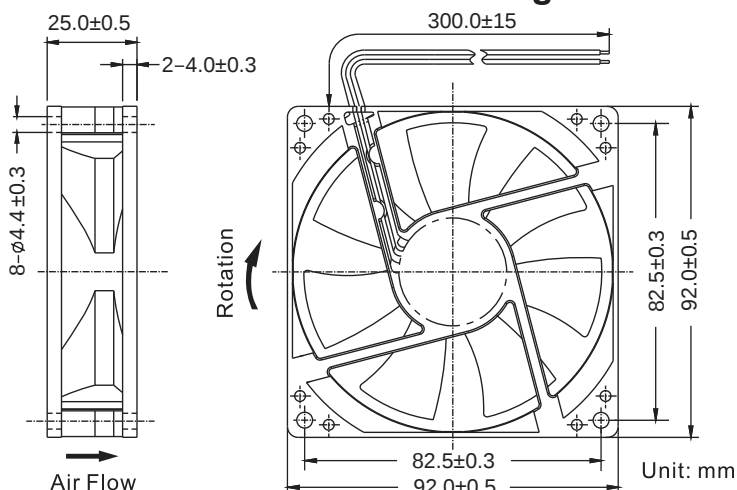

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

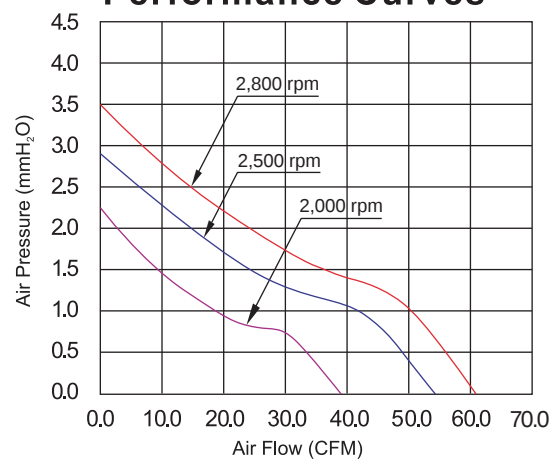

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RDH9025S	Sleeve	12	6.0~13.8	0.23	2,800	61.2	3.5	35	•	•	•	•	85
RDM9025S			6.0~13.8	0.19	2,500	53.9	2.8	31.8	•	•	•	•	
RDL9025S			6.0~13.8	0.16	2,000	37.7	2.2	23.4	•	•	•	•	
RDH9025B	Ball		6.0~13.8	0.23	2,800	61.2	3.5	35	•	•	•	•	
RDM9025B			6.0~13.8	0.19	2,500	53.9	2.8	31.8	•	•	•	•	
RDL9025B			6.0~13.8	0.16	2,000	37.7	2.2	23.4	•	•	•	•	
RDH9025S2	Sleeve	24	12.0~27.6	0.22	2,800	61.2	3.5	35	•	•	•	•	85
RDM9025S2			12.0~27.6	0.18	2,500	53.9	2.8	31.8	•	•	•	•	
RDL9025S2			12.0~27.6	0.15	2,000	37.7	2.2	23.4	•	•	•	•	
RDH9025B2	Ball		12.0~27.6	0.22	2,800	61.2	3.5	35	•	•	•	•	
RDM9025B2			12.0~27.6	0.18	2,500	53.9	2.8	31.8	•	•	•	•	
RDL9025B2			12.0~27.6	0.15	2,000	37.7	2.2	23.4	•	•	•	•	