
92 x 92 x 38 mm



Dimensions Drawing

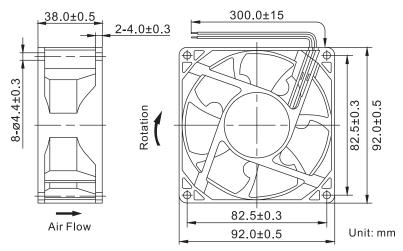

General Specification

Frame and Impeller: Thermal Plastic, UL 94V-0

Lead Wires : UL Type

(+): Red (-): Black


Operation Temperature : -10°C~70°C

35%~85%RH

Storage Temperature : -40°C~80°C

35%~85%RH

Performance Curves



Listed Model	Bearing System	Rated Voltage	Operation Voltage		Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	А	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	U U
RDH9238B1	Ball	12	7.0~13.8	2.2	5,000	105.0	15.4	52	•	•	•	•	196

- All readings are typical values at rated voltage.
- Specifications are subjected to change without prior notice.