


Dimensions Drawing

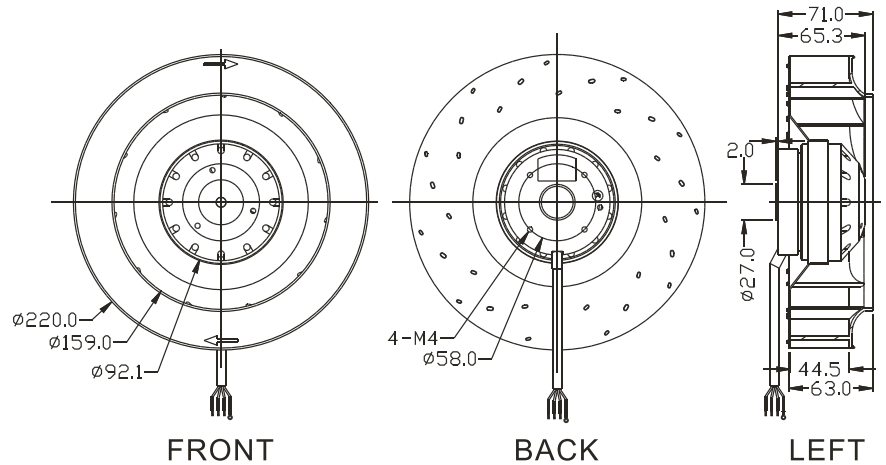


General Specification

Unit: mm

- Impeller : Plastic PA6.6(polyamide glass-fibre reinforced)
- Lead Wire : AWG#20 UL 2450
- Injection-moulded round sheet-metal plate
- Operation Temperature : -10°C~+65°C
35%~85%RH
- Motor : Capacitor-Run Induction and external rotor Motor
- Storage Temperature : -40°C~75°C
35%~85%RH
- Rotor : Black paint
- (220~240V) (100~125V)

Performance Curves

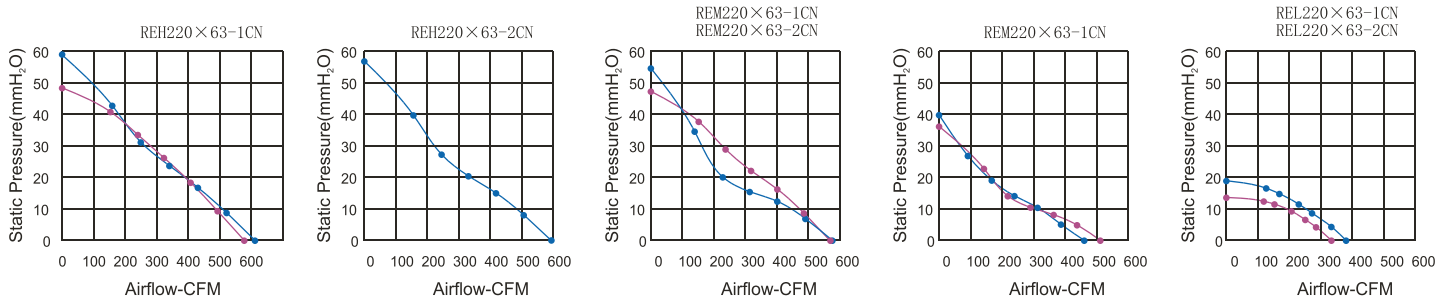

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Capacitor uf	Air Flow CFM	Static Pressure (mmH ₂ O)	Weight Gram
REH220x63-1CN	Ball	220~240	50/60	0.35/0.50	82/113	2600/2800	69/71	2.5	578/612	48.4/58.8	1600
REM220x63-1CN		220~240	50/60	0.31/0.44	71/101	2500/2600	69/69	2.5	564/578	47.3/54.6	
REL220x63-1CN		220~240	50/60	0.14/0.18	27/34	1400/1600	53/55	0.68	333/380	13.6/19.0	
REH220x63-2CN		100~125	60	1.0	116	2700	70	10.0	593	56.8	
REM220x63-2CN		100~125	60	0.87	105	2600	69	8.0	578	53.5	
REL220x63-2CN		100~125	60	0.27	34	1600	55	3.0	380	19.0	