


ø 225 x 99 mm

F Series




Dimensions Drawing

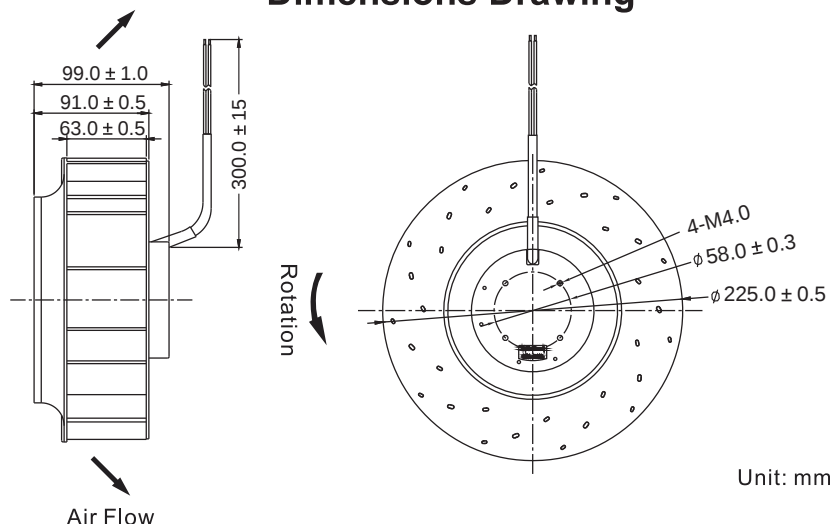


General Specification

- Impeller : PA6 UL 94V-0 Reinforced Plastic
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C
35%~85%RH
- Storage Temperature : -40°C~80°C
35%~85%RH

Mounting Panel Cutout



Performance Curves

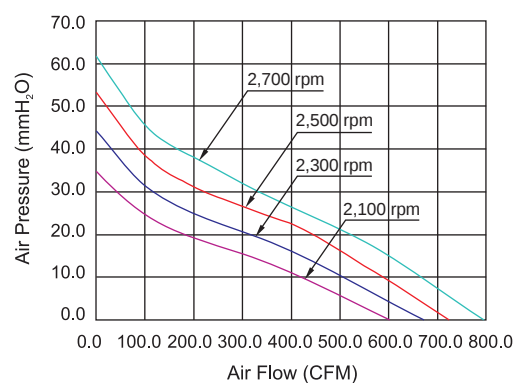

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RFH22599B2	Ball	24	15.0~27.6	4.00	2,500	724.2	53.4	70	•	•	•	•	1400
RFM22599B2			15.0~27.6	2.50	2,100	601.6	34.7	66	•	•	•	•	
RFH22599B4	Ball	48	28.0~58.0	2.50	2,700	795.5	62.0	72	•	•	•	•	
RFM22599B4			28.0~58.0	1.60	2,300	672.9	44.3	68	•	•	•	•	

- All readings are typical values at rated voltage.
- Specifications are subjected to change without prior notice.