




Dimensions Drawing

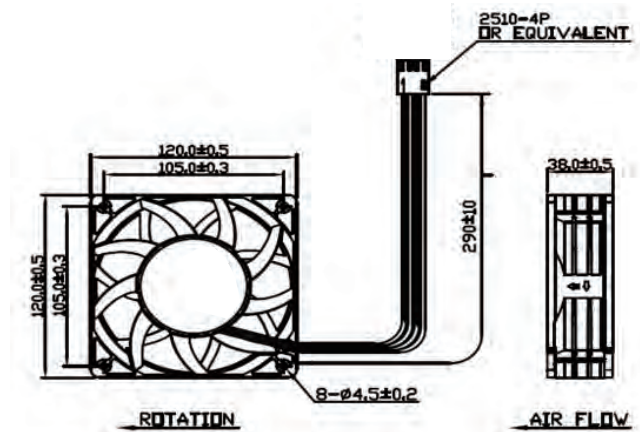


Unit: mm

General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C
65%+/-20%RH
- Storage Temperature : -40°C~70°C
65%+/-20%RH



Performance Curves

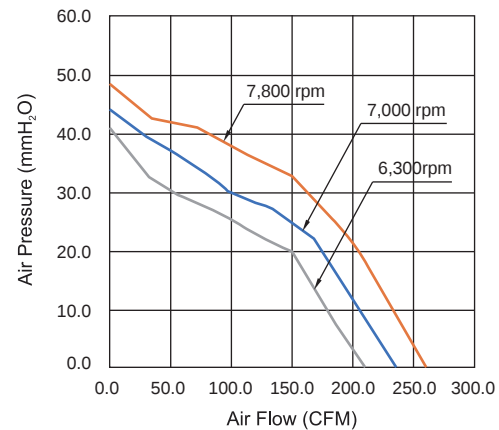

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RGD1238B2(H)	Ball	12	6.0~13.8	5	7,800	260.2	48.5	70	•	•		•	430
RGH1238B2(M)			6.0~13.8	3.6	7,000	233.6	44.0	66	•	•		•	
RGH1238B2(L)			6.0~13.8	2.55	6,300	210.0	42.0	65	•	•		•	