




Dimensions Drawing

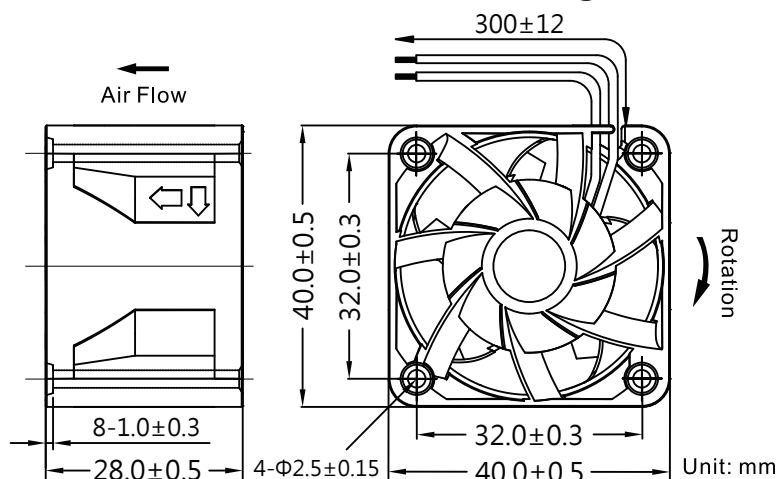

General Specification

Frame and Impeller : Thermal Plastic , UL 94V-0

Lead Wires : UL Type


(+) : Red (-) : Black

Operation Temperature : -10°C~70°C
35%~85%RH

Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

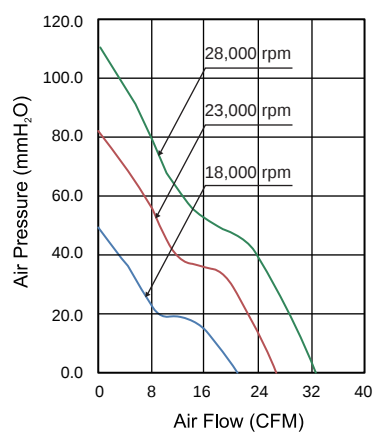

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RGD4028B1(12M)	Ball	12	6.0~13.8	0.65	23,000	26.3	81.7	60.5	•	•	•	•	50
RGD4028B1(12L)			6.0~13.8	0.4	18,000	21.2	45.1	53	•	•	•	•	
RGD4028B1(24H)		24	12.0~27.6	0.72	28,000	32.4	111.0	65.5	•	•	•	•	
RGD4028B1(24M)			12.0~27.6	0.52	23,000	26.3	81.7	60.5	•	•	•	•	
RGD4028B1(24L)			12.0~27.6	0.3	18,000	21.2	45.1	53	•	•	•	•	

