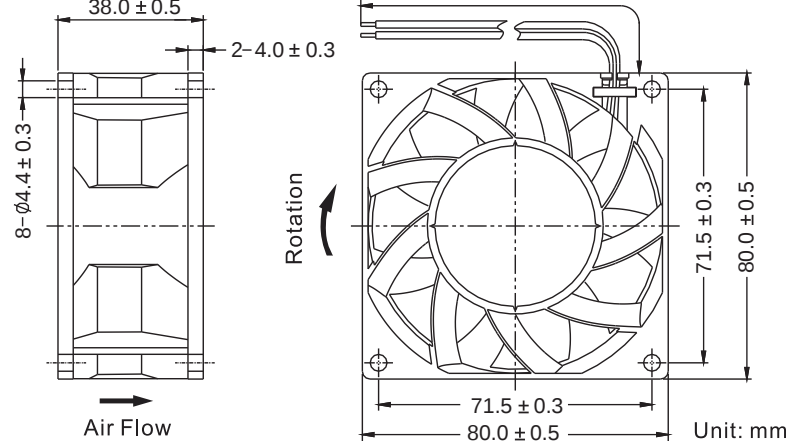


300.0 ± 15 

General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0


- Lead Wires : UL Type
(+) : Red (-) : Black

- Operation Temperature : -10°C~70°C
35%~85%RH

- Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

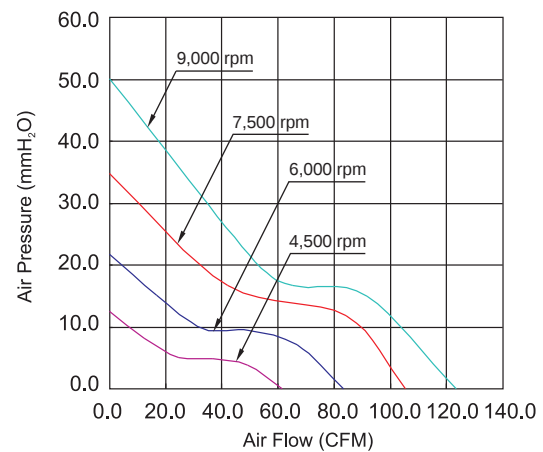

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RGD8038B1(7B)	Ball	12	6.0~13.8	2.80	9,000	123.3	50.0	67	●	●		●	180
RGH8038B1(7B)			6.0~13.8	1.55	7,500	105.2	34.8	63	●	●		●	
RGM8038B1(7B)			6.0~13.8	0.85	6,000	83.4	21.8	57	●	●		●	
RGL8038B1(7B)			6.0~13.8	0.45	4,500	61.5	12.4	49	●	●		●	
RGD8038B2(7B)	Ball	24	12.0~27.6	1.40	9,000	123.3	50.0	67	●	●		●	
RGH8038B2(7B)			12.0~27.6	0.78	7,500	105.2	34.8	63	●	●		●	
RGM8038B2(7B)			12.0~27.6	0.45	6,000	83.4	21.8	57	●	●		●	
RGL8038B2(7B)			12.0~27.6	0.25	4,500	61.5	12.4	49	●	●		●	
RGD8038B4(7B)	Ball	48	24.0~55.2	0.75	9,000	123.3	50.0	67	●	●		●	
RGH8038B4(7B)			24.0~55.2	0.45	7,500	105.2	34.8	63	●	●		●	
RGM8038B4(7B)			24.0~55.2	0.28	6,000	83.4	21.8	57	●	●		●	
RGL8038B4(7B)			24.0~55.2	0.18	4,500	61.5	12.4	49	●	●		●	

- All readings are typical values at rated voltage.
- Specifications are subjected to change without prior notice.