




Dimensions Drawing

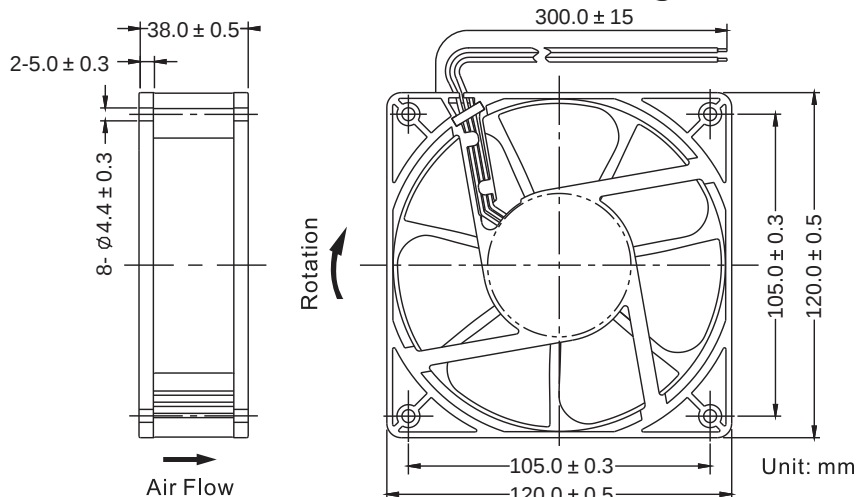


General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
- Operation Temperature : -10°C~70°C
35%~85%RH
- Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

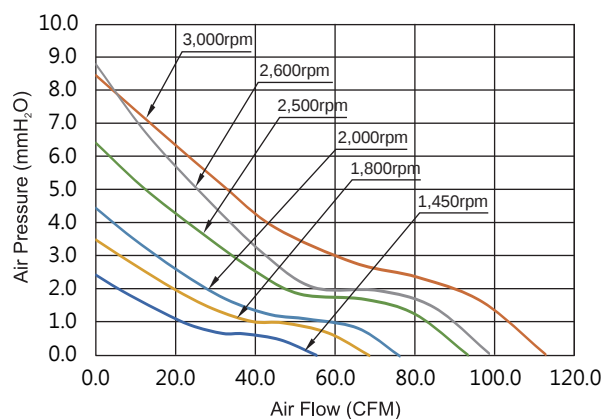

Listed Model	Bearing System	Rated Voltage	Frequency	Operation Voltage	Rated Current	Power	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
		VAC	Hz	VAC	A	W	RPM	CFM	mmH ₂ O	dBA	g
RJH1238B	Ball	110~240	50/60	85~265	0.12	5.3	3,000	113.3	8.5	43.8	285
RJM1238B(1)	Ball	110~240	50/60	85~265	0.1	3.93	2,600	98.7	8.7	41.7	
RJM1238B(2)	Ball	110~240	50/60	85~265	0.1	3.32	2,500	93.4	6.4	41.6	
RJL1238B(1)	Ball	110~240	50/60	85~265	0.08	2.05	2,000	76.3	4.4	34.2	
RJL1238B(2)	Ball	110~240	50/60	85~265	0.08	1.74	1,800	68.7	3.5	30.3	
RJL1238B(3)	Ball	110~240	50/60	85~265	0.08	1.3	1,450	55.4	2.4	25.1	

※ Current and Power are not safety values.