





Dimensions Drawing

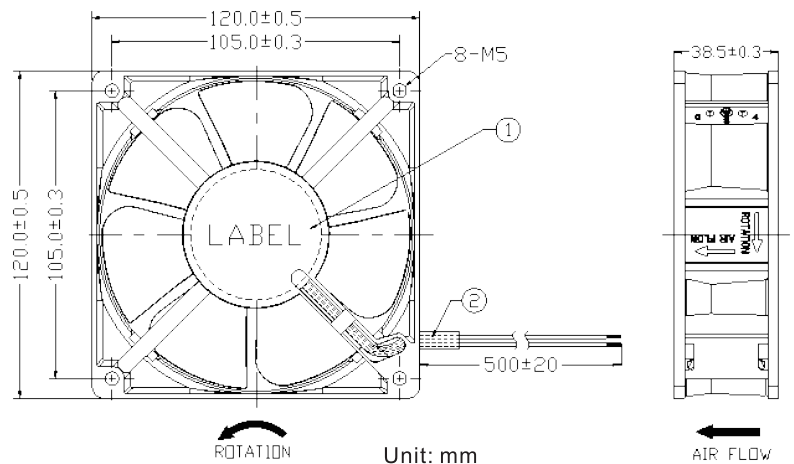

Performance Curves

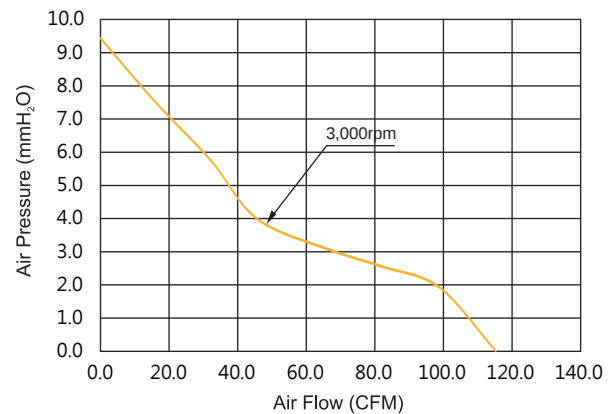

General Specification

- Frame : Aluminum Alloy
- Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
- Operation Temperature : -10°C~70°C
35%~85%RH
- Storage Temperature : -40°C~75°C
35%~85%RH



Listed Model	Bearing System	Rated Voltage	Frequency	Operation Voltage	Rated Current	Power	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
		VAC	Hz	VAC	A	W	RPM	CFM	mmH ₂ O	dBA	g
RJH1238B2(A)	Ball	110~240	50/60	85~265	0.12	5.66	3,000	115.3	9.4	46.1	313

※ Current and Power are not safety values.