





Dimensions Drawing

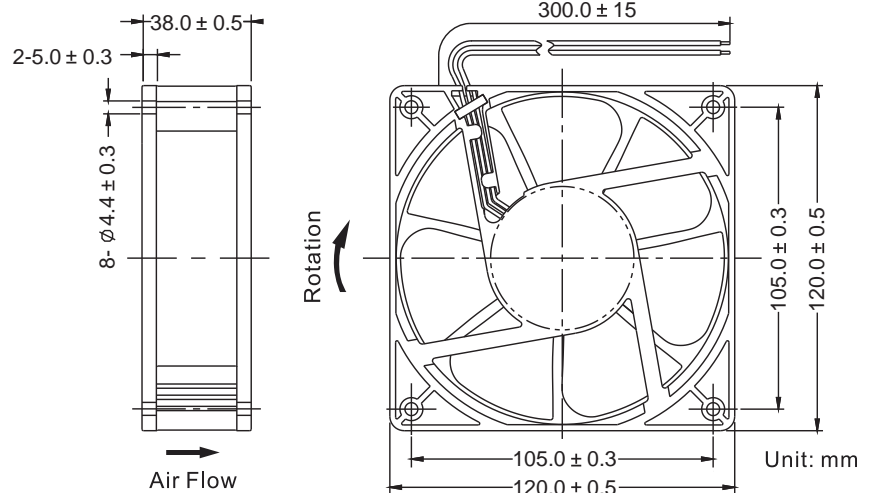

General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
- Operation Temperature : -10°C~70°C
35%~85%RH
- Storage Temperature : -40°C~80°C
35%~85%RH

Performance Curves

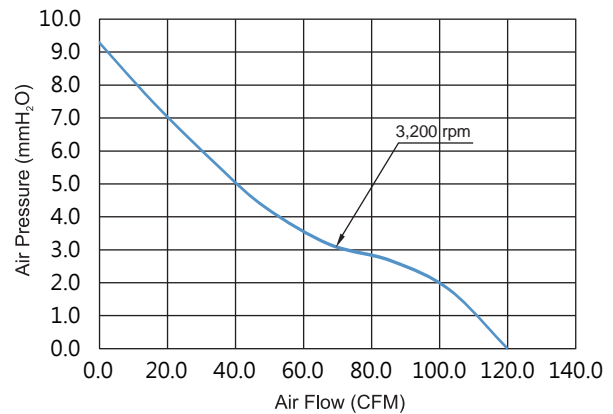

Listed Model	Bearing System	Rated Voltage	Frequency	Operation Voltage	Rated Current	Power	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
		VAC	Hz	VAC	A	W	RPM	CFM	mmH ₂ O	dBA	g
RJH1238B(IP68)	Ball	110~240	50/60	85~265	0.12	6.77	3,200	120	9.3	44.6	430

※ Current and Power are not safety values.