





Dimensions Drawing

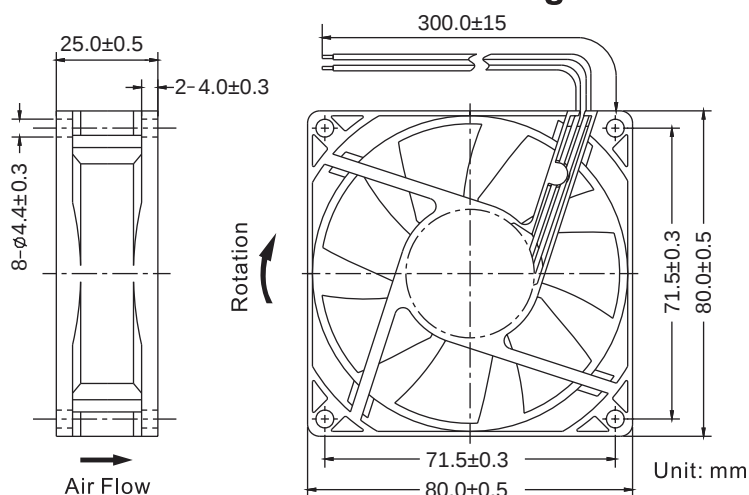

General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C
35%~85%RH
- Storage Temperature : -40°C~80°C
35%~85%RH

Performance Curves

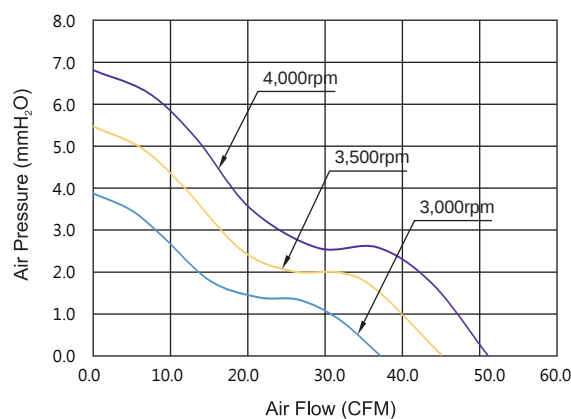

Listed Model	Bearing System	Rated Voltage	Frequency	Operation Voltage	Rated Current	Power	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
		VAC	Hz	VAC	A	W	RPM	CFM	mmH ₂ O	dBA	g
RJH8025B	Ball	100~240	50/60	85~265	0.07	4	4,000	51.1	6.81	42.4	88
RJM8025B	Ball	100~240	50/60	85~265	0.06	2.9	3,500	45.04	5.47	39.1	
RJL8025B	Ball	100~240	50/60	85~265	0.04	1.9	3,000	37.12	3.88	34.7	

※ Current and Power are not safety values.