




Dimensions Drawing

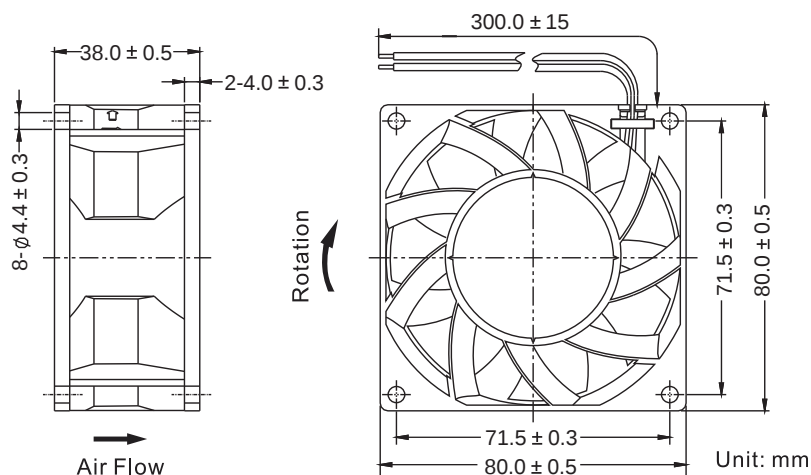


General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
- Operation Temperature : -10°C~70°C
35%~85%RH
- Storage Temperature : -40°C~80°C
35%~85%RH



Performance Curves

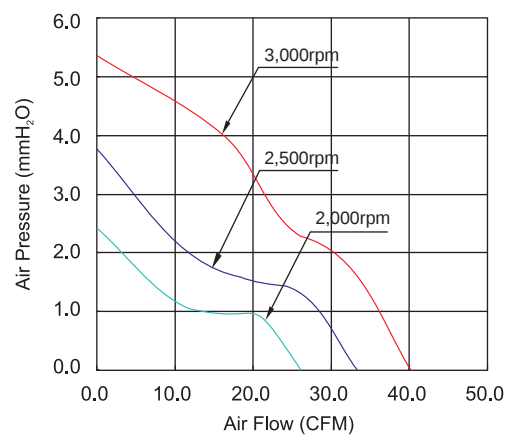

Listed Model	Bearing System	Rated Voltage	Frequency	Operation Voltage	Rated Current	Power	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
		VAC	Hz	VAC	A	W	RPM	CFM	mmH ₂ O	dBA	g
RJH8038B1	Ball	115	50/60	85~132	0.06	5.0	3,000	40.1	5.3	37	155
RJM8038B1				85~132	0.04	2.0	2,500	33.3	3.7	32	
RJL8038B1				85~132	0.03	1.0	2,000	26.1	2.4	26	
RJH8038B2	Ball	230	50/60	140~264	0.03	5.0	3,000	40.1	5.3	37	
RJM8038B2				140~264	0.025	2.0	2,500	33.3	3.7	32	
RJL8038B2				140~264	0.02	1.0	2,000	26.1	2.4	26	