





Dimensions Drawing

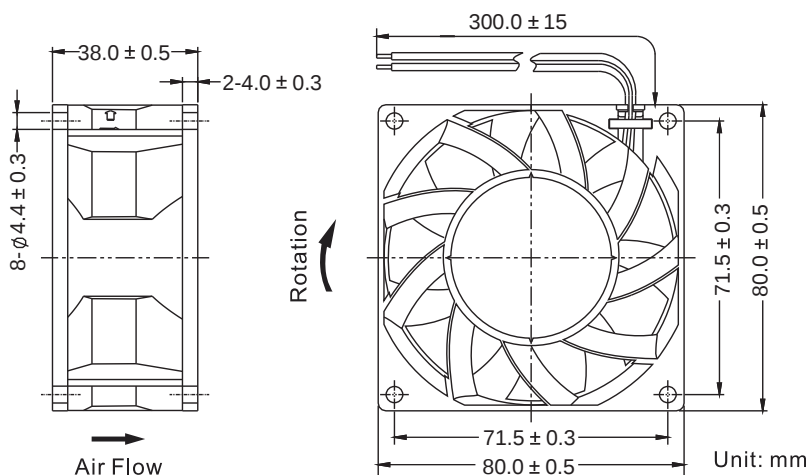

Performance Curves

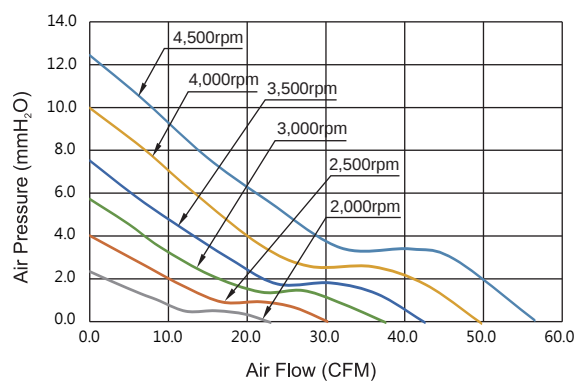

- **General Specification**
- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
- Operation Temperature : $-10^{\circ}\text{C} \sim 70^{\circ}\text{C}$
35%~85%RH
- Storage Temperature : $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
35%~85%RH

Listed Model	Bearing System	Rated Voltage	Frequency	Operation Voltage	Rated Current	Power	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
		VAC	Hz	VAC	A	W	RPM	CFM	mmH ₂ O	dBA	g
RJU8038B	Ball	100~240	50/60	85~265	0.1	5	4,500	56.5	12.4	49.1	148
RJV8038B	Ball	100~240	50/60	85~265	0.08	4	4,000	49.8	10	45.6	
RJD8038B	Ball	100~240	50/60	85~265	0.06	2.5	3,500	42.6	7.5	41.8	
RJH8038B	Ball	100~240	50/60	85~265	0.04	2.0	3,000	37.6	5.7	37.4	
RJM8038B	Ball	100~240	50/60	85~265	0.03	1.6	2,500	30.22	4.02	31.4	
RJL8038B	Ball	100~240	50/60	85~265	0.02	1.0	2,000	23	2.35	24.6	

※ Current and Power are not safety values.