


92 x 92 x 25 mm

J Series




Dimensions Drawing

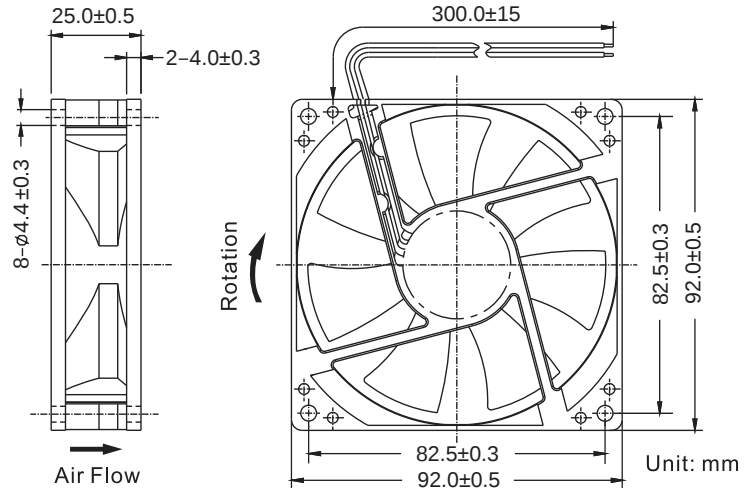

General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C
35%~85%RH
- Storage Temperature : -40°C~80°C
35%~85%RH

Performance Curves

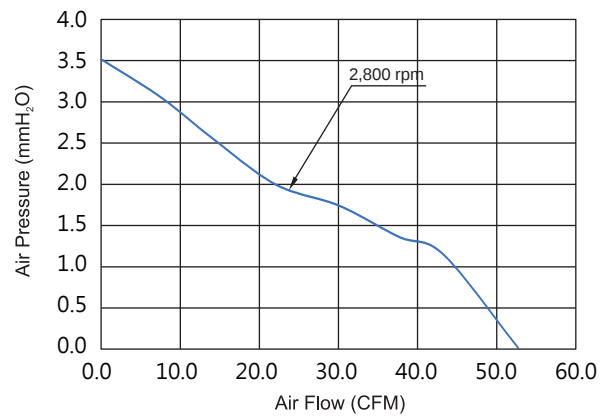

Listed Model	Bearing System	Rated Voltage	Frequency	Operation Voltage	Rated Current	Power	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
		VAC	Hz	VAC	A	W	RPM	CFM	mmH ₂ O	dBA	g
RJH9225B	Ball	100~240	50/60	85~265	0.065	3.12	2,800	52.73	3.52	35.1	84.3

※ Current and Power are not safety values.

- All readings are typical values at rated voltage.
- Specifications are subjected to change without prior notice.