





Dimensions Drawing

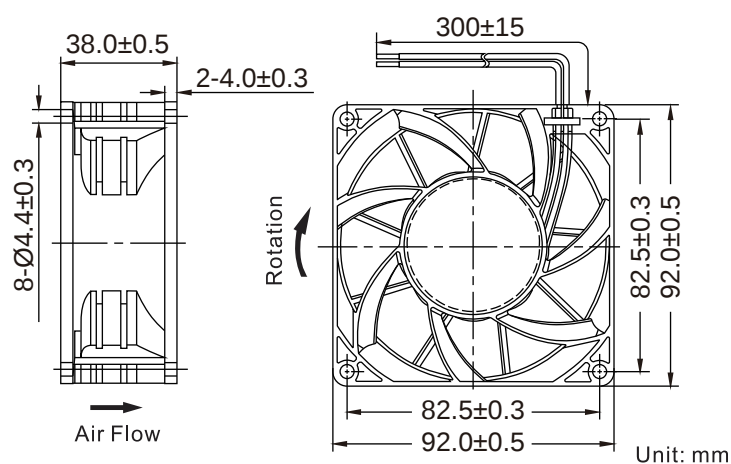

General Specification

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C
35%~85%RH
- Storage Temperature : -40°C~80°C
35%~85%RH

Performance Curves

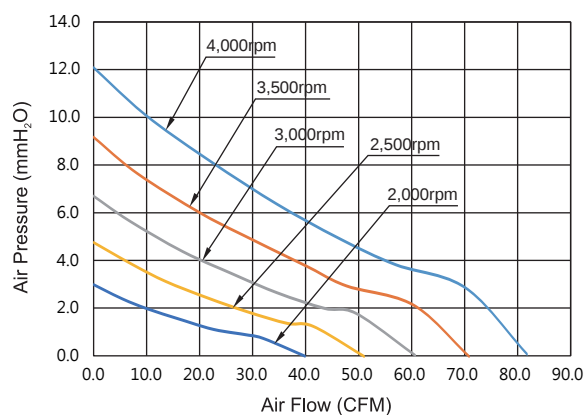

Listed Model	Bearing System	Rated Voltage	Frequency	Operation Voltage	Rated Current	Power	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
		VAC	Hz	VAC	A	W	RPM	CFM	mmH ₂ O	dBA	g
RJV9238B	Ball	100~240	50/60	85~265	0.12	6.0	4,000	81	11.7	47.7	191
RJD9238B	Ball	100~240	50/60	85~265	0.1	4.5	3,500	70.86	9.17	44	
RJH9238B	Ball	100~240	50/60	85~265	0.08	3.1	3,000	62.09	6.92	40.1	
RJM9238B	Ball	100~240	50/60	85~265	0.06	2	2,500	51	4.75	34.4	
RJL9238B	Ball	100~240	50/60	85~265	0.04	1.35	2,000	39.92	2.98	27.4	

※ Current and Power are not safety values.