

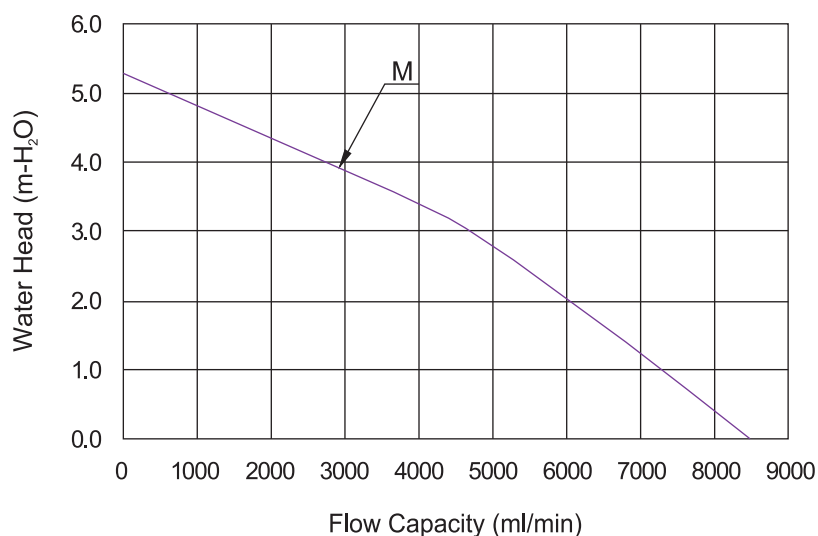


Parameter measure condition : pump is filled with pure water

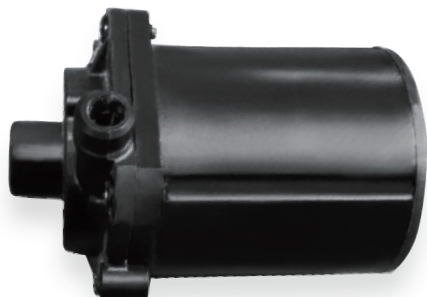

- **General Specification :**
- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~40°C
100%RH
- Storage Temperature : -20°C~70°C
5%~95%RH
- Ingress Protection Rating : IPX8

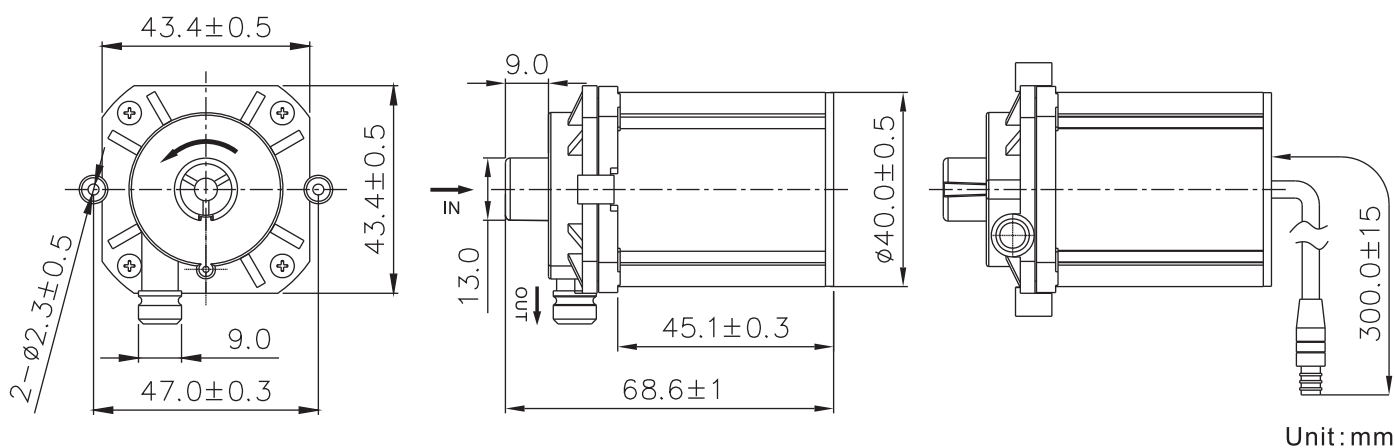

Listed Model	Rated Voltage	Operation Voltage	Input Current	Flow Capacity	Water Head	Acoustical Noise	Operation Temperature	Weight
	VDC	VDC	A	ml/min	m-H ₂ O	dBA	°C	g
RPM6843	12	6.0~13.8	1.60	8,500	5.5	30	-10~+40	182