

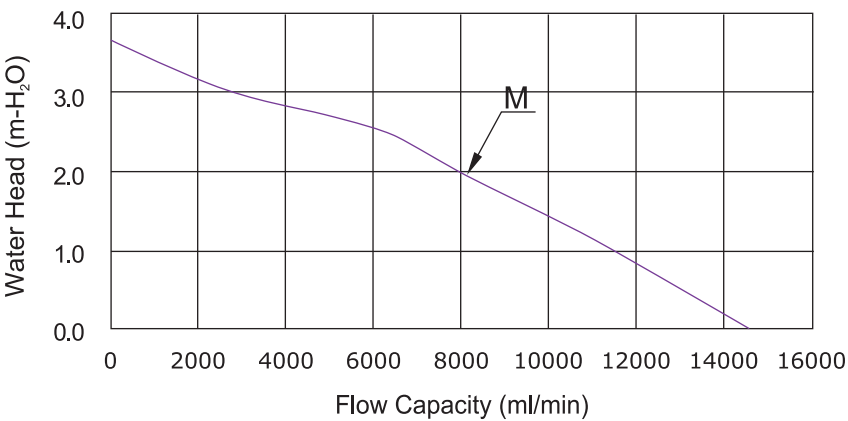


Parameter measure condition : pump is filled with pure water

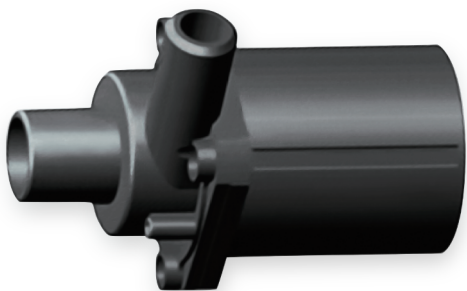

- **General Specification :**
  - Frame and Impeller : Thermal Plastic , UL 94V-0
  - Lead Wires : UL Type  
( + ) : Red ( - ) : Black
- Operation Temperature : -10℃~40℃  
100%RH
  - Storage Temperature : -20℃~70℃  
5%~95%RH
  - Ingress Protection Rating : IPX8

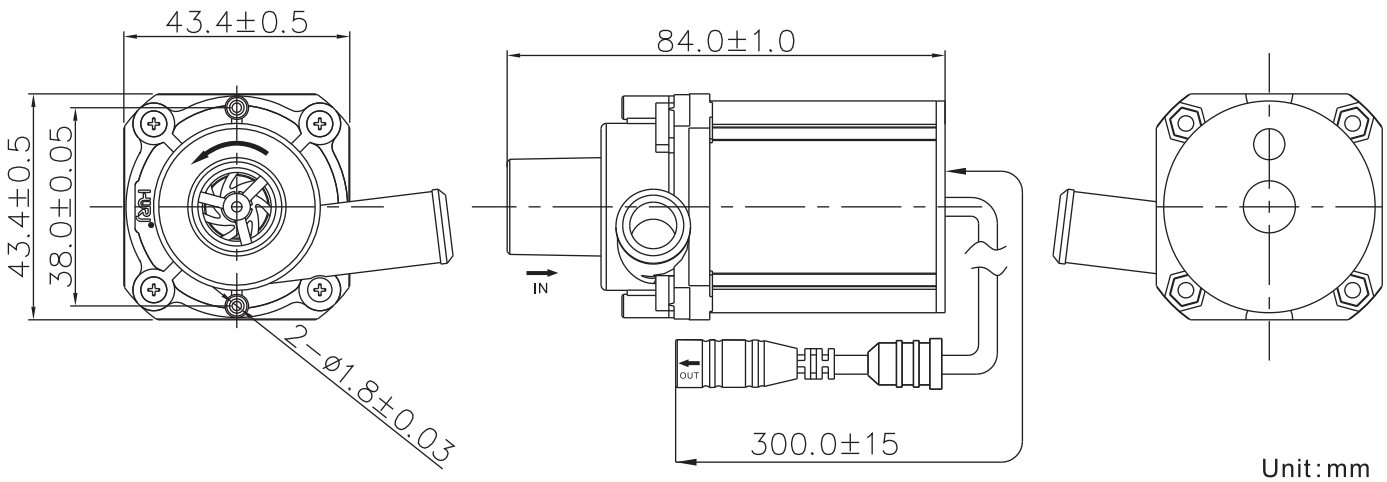

| Listed Model | Rated Voltage | Operation Voltage | Input Current | Flow Capacity | Water Head         | Acoustical Noise | Operation Temperature | Weight |
|--------------|---------------|-------------------|---------------|---------------|--------------------|------------------|-----------------------|--------|
|              | VDC           | VDC               | A             | ml/min        | m-H <sub>2</sub> O | dBA              | ℃                     | g      |
| RPM8443      | 12            | 8.0~13.8          | 1.90          | 14,500        | 3.6                | 29               | -10~+40               | 204    |

● All readings are typical values at rated voltage.  
● Specifications are subjected to change without prior notice.